


高速自动加油曲折缝纫机（大梭）系列
HIGH SPEED AUTO OILER SINGLE NEEDLE ZIGZAG MACHINE SERIS

1512&1512DD&1512AUT
1522&1522DD&1522AUT
1513&1513DD&1513AUT
1523&1523DD&1523AUT

SERIS

零件分解图
EXPLODED DRAWING
使用说明书
INSTRUCTION MANUAL

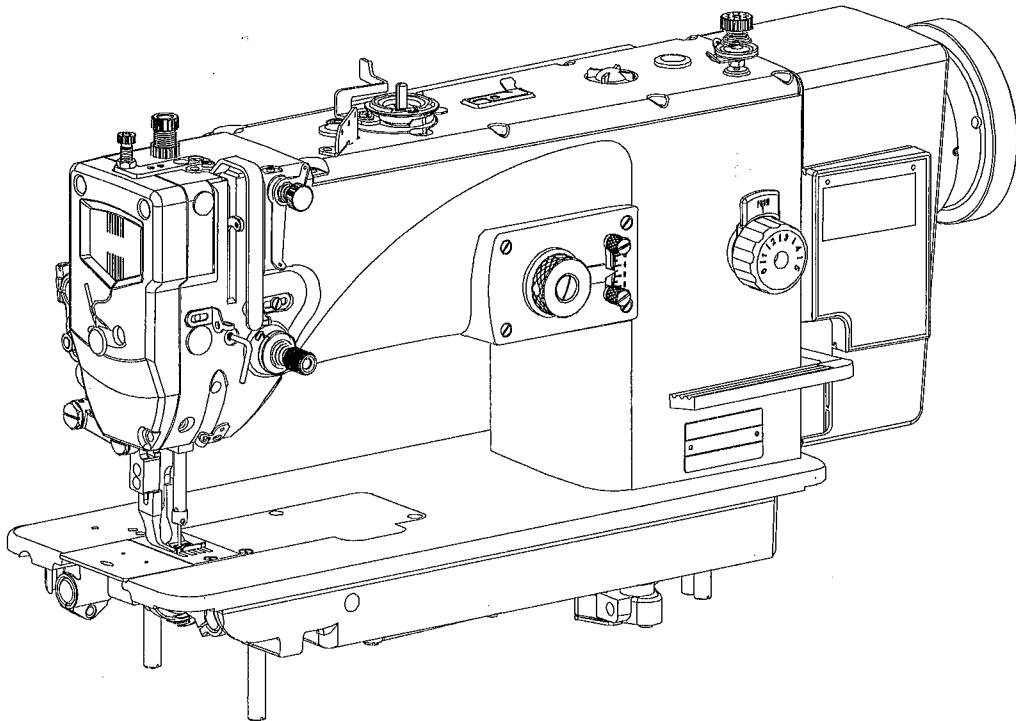

Read safety Instructions carefully and understand them before using.
Retain this Instruction Manual for future reference.

为了安全地使用，请您在使用之前仔细阅读本使用说明书。
另外，请您注意保管本使用说明书，以便随时查阅。



目录/ CONTENTS

使用说明书/ Operation Manual

缝纫机规格/ Sewing machine specification	1-2
1 机针和线/ NEEDLE AND THREAD	3
2 安装膝控抬压脚/ INSTALLING THE KNEE LIFTER	4-5
3 润滑油/ LUBRICATION	6
4 润滑油条件/ LUBRICATION CONDITION	6
5 机针的安装/ HOW TO INSTALL THE NEEDLE	7
6 旋梭的安装/ HOW TO INSTALL THE BOBBIN	7
7 机器穿线/ HOW TO THREAD THE MACHINE HEAD	8
8 调整缝制长度/ ADJUSTING THE STITCH LENGTH	9
9 调节压脚压力/ ADJUSTING THE PRESSER FOOT PRESSURE	9
10 线张力调节/ THREAD TENSION	10
11 缝目宽度调节器/ STITCH WIDTH REGULATOR	10
12 如何控制人字缝目宽度/ HOW TO CONTROL THE WIDTH OF ZIGZAG STITCH	11
13 机针与旋梭的关系/ NEEDLE-TO-HOOK RELATIONSHIP	12
14 常见问题故障排解/ TROUBLESHOOTING CHART	13-14

零件样本/ Parts Book

1 机壳分组件/ Machine body	16-17
2 上轴、竖轴、挑线机构/ Needle bar and thread take-up mechanism	18-19
3 摆针机构/ Needle bar components	20
4 下轴、梭轴机构/ Hook mechanism	21
5 缝目调节机构/ Stitch width regulator mechanism	22-23
6 下送布机构/ Feed mechanism	22-23
7 抬压脚机构/ Presser foot mechanism	24-25
8 多点摆针机构/ 3&4 Points mechanism	24-25
9 上送料机构/ Upper feed mechanism	26-27
10 剪线机构 / Thread trimming mechanism	28-29
11 自动抬压脚机构 / Presser foot lifting set mechanism	30-31
12. 自动倒送料、开关组件/Automatic reverse feed components	30-31
13 电控部件/ Driver components	32-33
14 供油机构/ Oil lubrication mechanism	34
15 附件/Accessories	35-36

HIGH SPEED AUTO OILER SINGLE NEEDLE ZIGZAG MACHINE SERIS

操作手册 INSTRUCTION MANUAL

1512&1512DD&1512AUT
1513&1513DD&1513AUT
1522&1522DD&1522AUT
1523&1523DD&1523AUT

高速自动加油曲折缝纫机（大梭）系列
1-NEEDLE, TOP&HIGH SPEED AUTO OILER
SINGLE NEEDLE ZIGZAG MACHINE SERIS

为了提高机器的耐久性，请在使用前详细阅读使用说明书，并请妥善保存好说明书以便随时使用。

操作前应注意事项：**BEFORE OPERATION**

1. 机器未加油润滑前，请勿启动机台或试转。
2. 请先确认工作场所使用的电压及相数（单相或三相），并详阅马达铭牌上注明的规格，是否相符。
3. 机台安装完毕，第一试转请先确认机头上轮运转方向。
★开启电源，并保持低速运转，从机头上轮位置方向观察，上轮运转方向是逆时针旋转。
4. 机台开始使用第一个月，请保持或低于1600转/每分钟速度运转。


1. Do not operate the machine even for trial before lubrication it.
2. Confirm that the voltage and phase (single or 3-phase) are correct by checking them against the ratings shown on the motor nameplate.
3. When running your machine for the first time after the set-up , check the rotational direction of the handwheel . ★Turn on the power switch. Run the machine at a low speed while checking the rotational direction of the handwheel . (The handwheel should turn counterclockwise as observed from the handwheel side.)
4. For the first month run the machine at speed of 1600s.p.m or less.

操作时应注意事项：**CAUTIONS IN OPERATION**

1. 启动电源或机器运转期间，请勿将手靠近机针位置，并保持距离。
 2. 机台操作运转期间，请勿将个人或让他人的头、手指等靠近机头上轮、V型皮带、绕线器或者马达，同时，亦请勿置其它物品靠近上述地方，以免发生危险。
 3. 请勿于移除护指器、皮带罩、与任何其它的保护装置的情况下，操作机器。
 4. 移动V型皮带前，务必先将电源关闭，及马达确实已停止转动，才进行下一动作。
1. Keep your hands away from the needle when you turn on the power switch or while the machine is operating
 2. During operation be careful not to allow your or any other person's head or fingers to come close the handwheel, V-belt, bobbin winder or motor. Also do not place anything close to them
 3. Do not turn the machine with the finger guard, belt cover or any other protectors removed
 4. Be sure to turn off the power switch and confirm that the motor is completely stopped before removing the V-belt.

缝纫规格 Sewing machine specification

1512-□



	1	2	3
A	下送料 平板 Bottom feed Flat bed	上下送料 平板 Top and bottom feed Flat bed	上下送料 筒式 Top and bottom feed Cylinder type
B	2	3	4


	—	DD	AUT
C	皮带式传动 Belt drive	节能直驱 Direct-drive	电脑车 Direct-drive thread trimmer

台板

1512&1522 Series


台板的厚度应达到 40mm，能够承受缝纫机的重量，并经得起缝纫机的震动。

请在如图所示位置上钻孔。

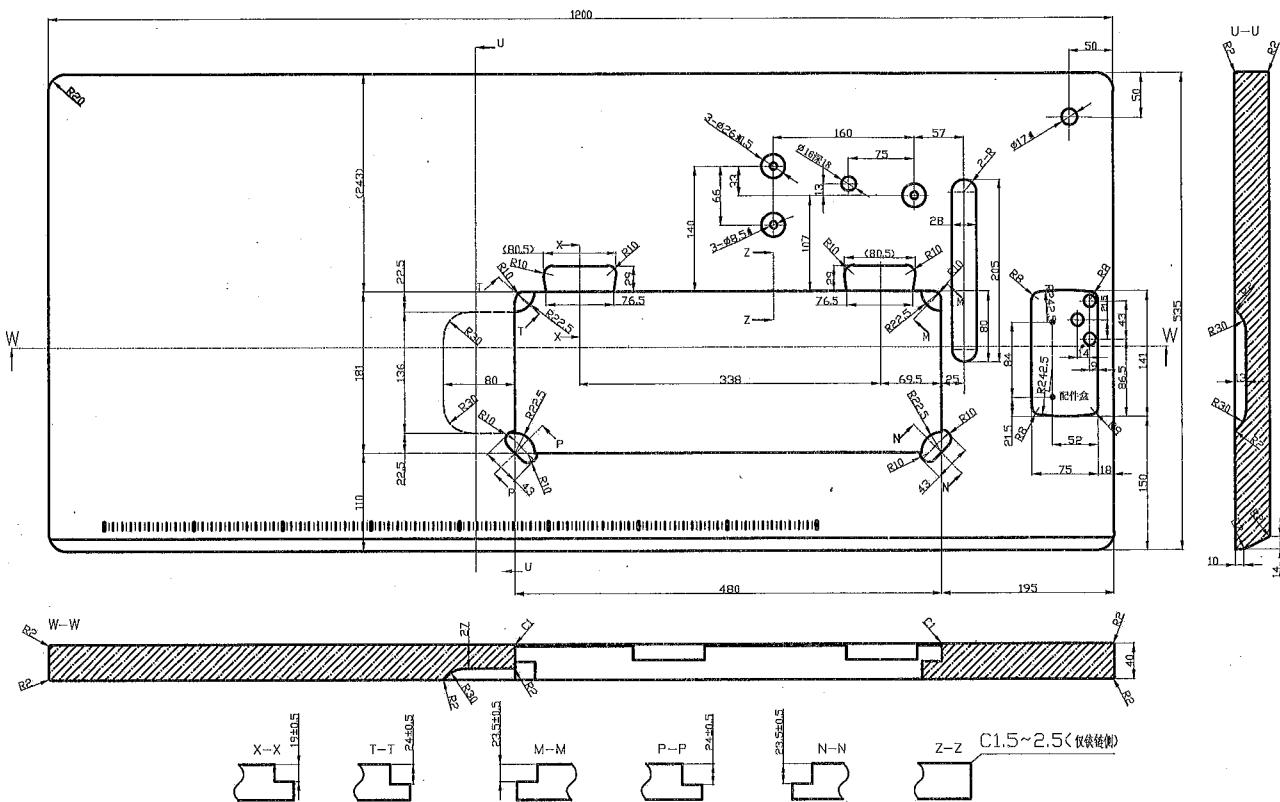

台板

1512DD&1512AUT&1522DD&1522AUT Series

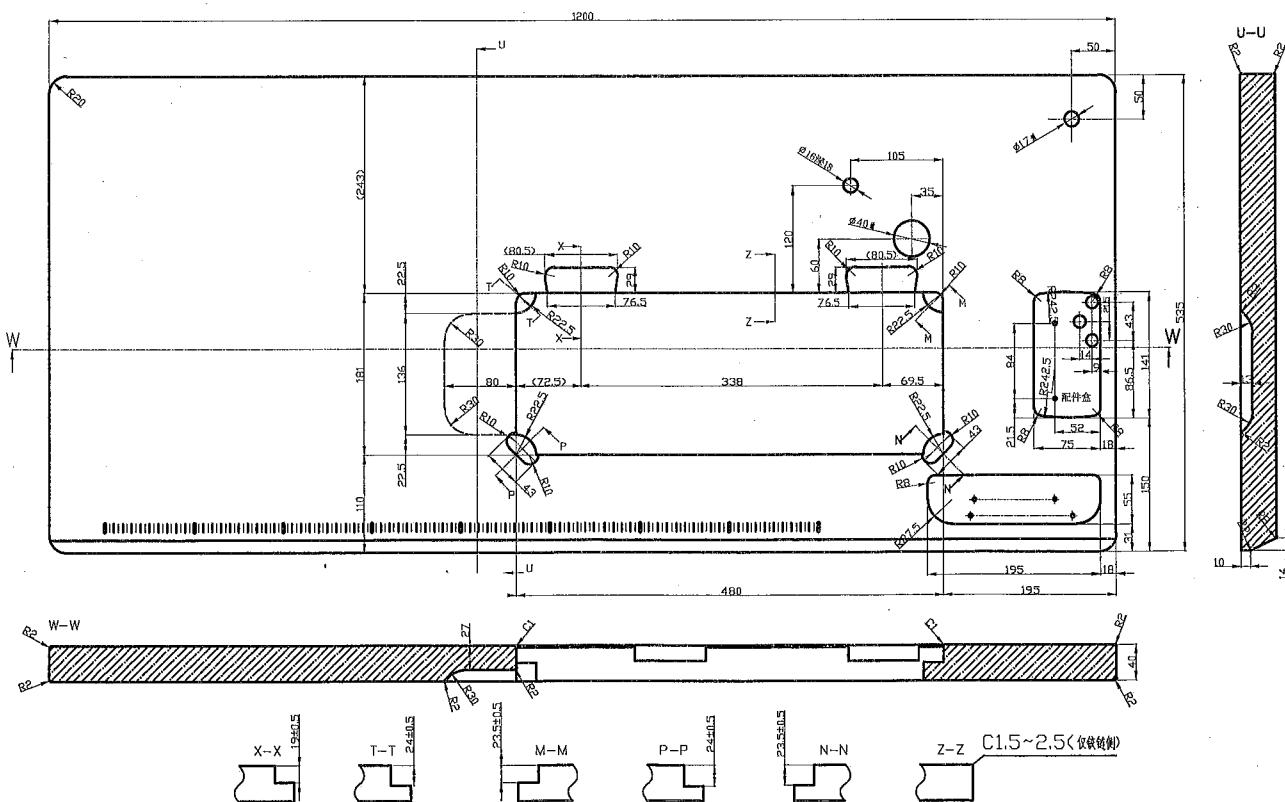

主要技术规格 SPECIFICATIONS

使用	薄料到中厚料
缝纫速度※	最大 2000 s. p. m
缝制长度	前缝： 5mm，倒缝： 5mm
最大人字宽度	9mm
针杆行程	35mm
压脚提升高度	手动升： 8mm，膝提升： 13mm
机针	见目次 1★ 机针和线 ★
润滑油	机油(白砂油)

※最大的速度是依靠面料、线和缝制条件。

Usage	Light to medium weight material
Sewing speed	Max 2000s p.m
Stitch length	Forward stitch: 5mm Reverse stitch: 5mm
Max stitch width	9 mm
Needle bar stroke	35 mm
Lift of presser foot	Hand lifter: 8 mm, Knee lifter: 13 mm
Needle	See page 1 for table on 'NEEDLE AND THREAD'
Lubricating oil	Machine oil (white spindle oil)

※ Maximum speed will vary depending on fabric threads and sewing condition

人字宽度和最大速度之间关系

RELATIONSHIP BETWEEN ZIG ZAG WIDTH AND MAXIMUM SPEED

人字宽度	0mm~5mm	5mm~9mm
最大速度	2000 s. p. m	1800 s. p. m
Zigzag width	0mm~5mm	5mm~9mm
Max speed	2000s. p. m	1800s. p. m

1. 机针和线

1. NEEDLE AND THREAD

选择适当的机针不仅依靠机器型号而且也要考材料线的使用，适当的机针和线的尺寸去用在各种机器型号上，请参考以下的规格：


Selection of the proper needle depends not only on the machine model, but also on the material thread used. For selection of proper needle and thread sizes to be used on the various machine model, please refer to the table below

等级应用	薄料	中料	中厚料
最大线尺寸 合成物	120	60	30
机针尺寸	DP×17 #10	DP×17 #12~#16	DP×17 #18~#19


Application of class	For light-weight materials	For medium-weight materials	For medium-heavy weight materials
Max thread size (Nm)-Synthetic	120	60	30
Needle size	DP×17 #10	DP×17 #12~#16	DP×17 #18~#19

2. 缝纫机的安装


2. INSTALLATION OF SEWING MACHINES

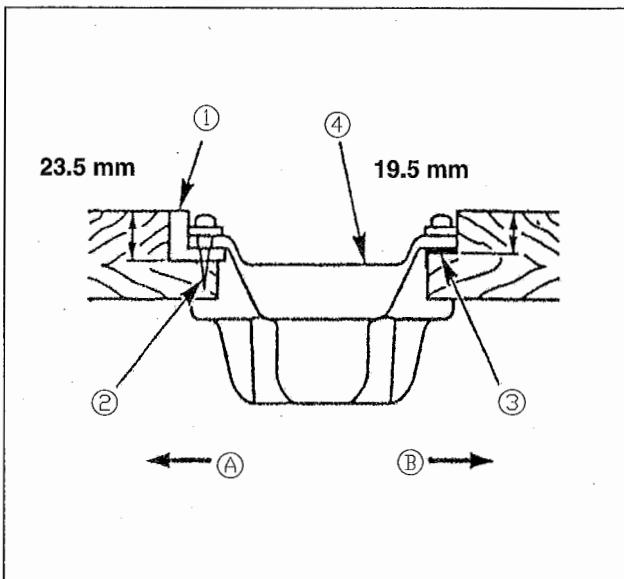

- 1) 把油槽支到机台槽的四角上。
- 2) 用螺丝钉②把前侧Ⓐ的个机头部橡胶支座①钉到机台的伸出部，用粘合剂接固定好铰链侧Ⓑ的2个机头部橡胶垫座③，然后把油槽④放上。
- 1) The oil pan should rest on the four corners of the machine table groove.
- 2) Two rubber seats ① for supporting the head portion on the operator side are fixed on the extended portion of the table by hitting the nail ② and the other two rubber cushion seats ③ on the hinge side are fixed by using a rubber-based adhesive. Then, oil pan ④ is placed.



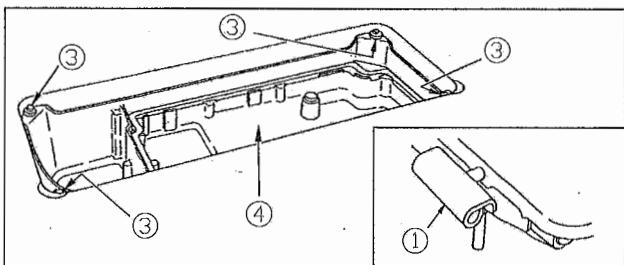


- 3) 把铰链①放到机台的孔上，对准台板橡胶支座②，把机头放到四角的机头胶垫③上。
- 3) Fit hinge①into the opening in the machine bed, and it the machine head to table rubber hinge ② before placing the machine head on cushions ③ on the four corners.

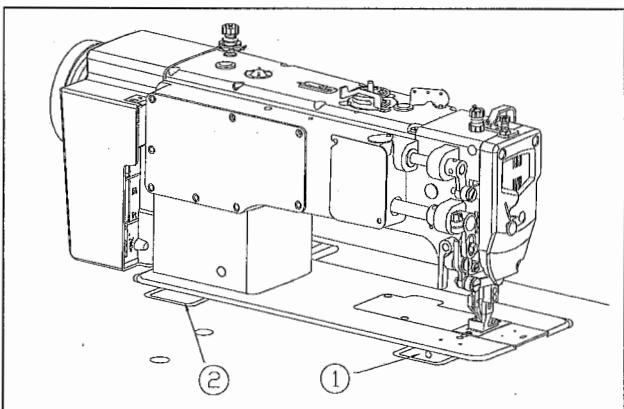

2. 安装膝控抬压脚

2. INSTALLING THE KNEE LIFTER

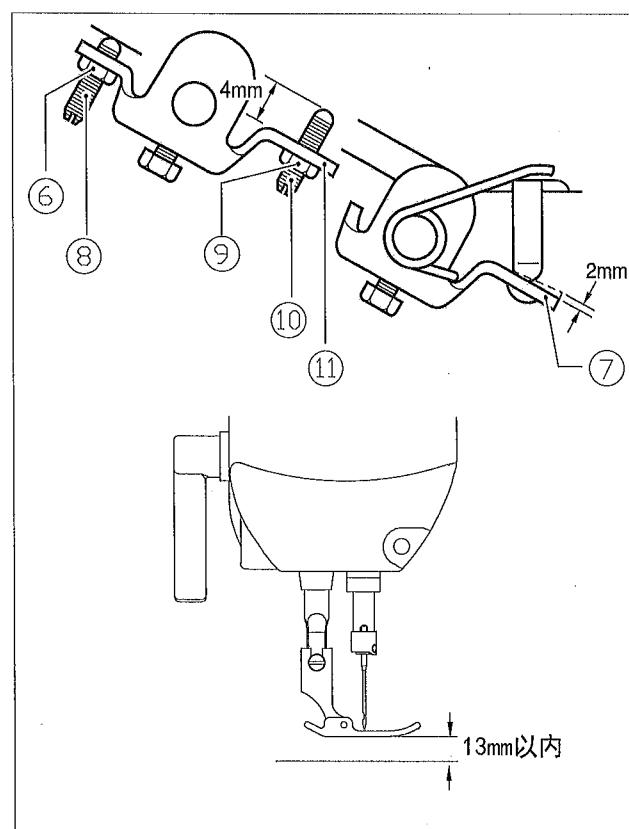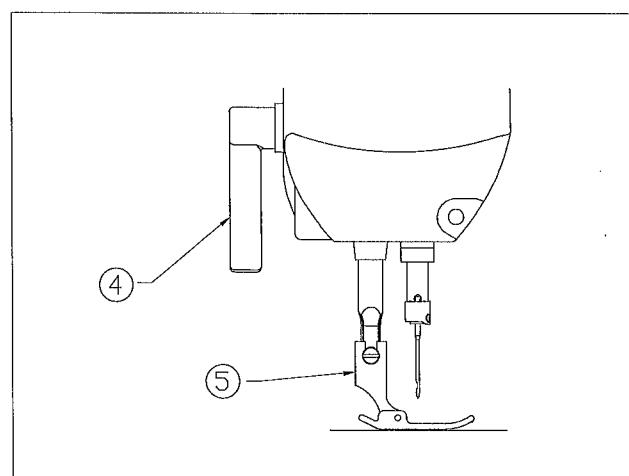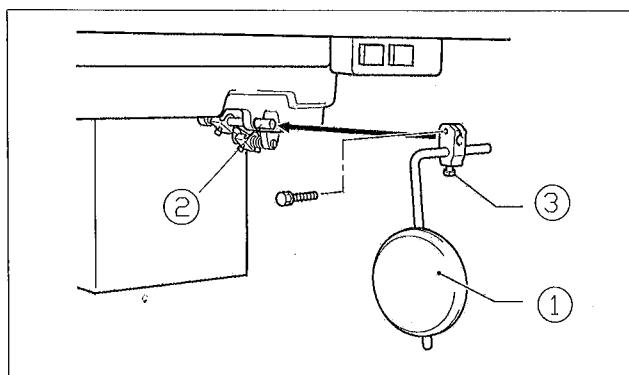

11. 膝控碰块

① 膝控碰块

② 螺栓

* 松开螺栓③，将膝控碰块①。
移至易于使用的位置。

Insert the knee lifter assy. ① into the shaft② under the oil pan , and slightly tight the screw③ .

<调整抬压杠杆>

1. 转动手轮以便送布牙处于针板的下方。
2. 用压脚扳手④放下压脚⑤。

Turn the handwheel so that the feed teeth ④ are under the needle plate⑤ .

3. 松开螺母⑥。

4. 转动螺钉⑧进行调节，以便用手在轻压膝控碰块①时抬压杠杆⑦游隙量约为2mm。

5. 完成调节后，将拧紧螺母⑥。

6. 松开螺母⑨。

7. 转动螺钉⑩直至螺钉头与抬压杠杆⑪的间距约为4mm。

8. 转动调节螺钉⑪进行调节，以便在完全压下膝控碰块①时，压脚⑤处在针板上方10mm范围内 的位置。

9. 完成调节后，将螺母⑨拧紧。

3. Loosen the nut⑥.

4. Turn the screw⑧to adjust the bracket⑦to 2mm play.

5. Securely tighten the nut⑥.

6. Loosen the nut⑨.

7. Turn the screw⑩until the distance between the end of the screw and bracket⑪is approximately 4mm.

8. Turn the adjusting screw⑪ to adjust , so that the presser foot ⑤is at the desired position within a distance of 13mm above the needle plate.

9. After adjustment , tighten the nut⑨ .


3. 润滑油 3. LUBRICATION

* 注意：进行此步骤时，务必关掉电源，马达确保停止转动，以避免不必要的危险！



CAUTION


TURN THE SWITCH OFF THE POWER SUPPLY TO PREVENT FROM UNEXPECTED INJURY. BE SURE TO CONFIRM THE STOP OF ROTATION OF THE MOTOR BEFORE OPERATIONS.

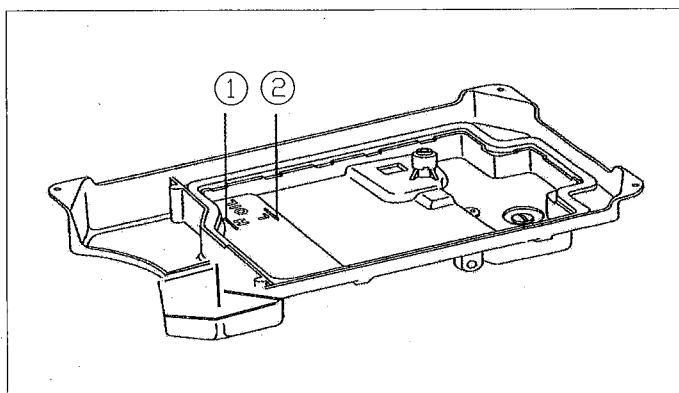

- 1) 把油注入标记线 "H" ①。
 - 2) 当油杆到入在标注 "L" ②，再次注入油。
(使用油: 白砂油)
- 1) Fill oil up to marker line "H" ①.
2) When the oil level drops under marker line "L" ②, refill it.
(Using oil is white spindle oil,)

4. 润滑油调节

4. LUBRICATION CONDITION

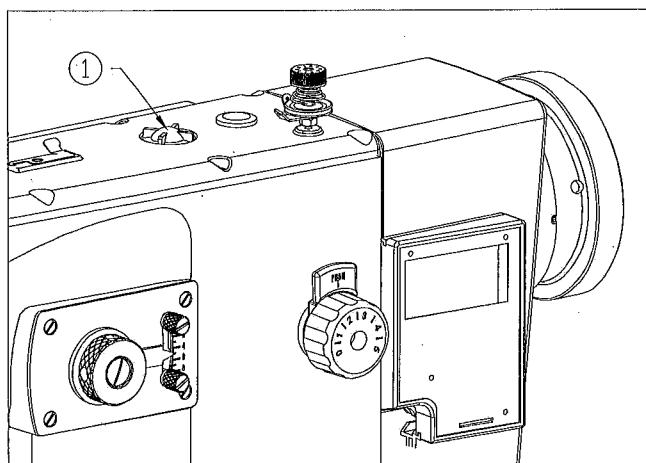

- 1) 操作缝纫机并确定散射油石在油槽里①。
- 1) Operate the sewing machine, and confirm the scattering oil at oily window ①.

5. 机针的安装

5. HOW TO INSTALL THE NEEDLE

* 注意：进行此步骤时，务必关掉电源，马达确保停止转动，以避免不必要的危险！



CAUTION

TURN THE SWITCH OFF THE POWER SUPPLY TO PREVENT FROM UNEXPECTED INJURY. BE SURE TO CONFIRM THE STOP OF ROTATION OF THE MOTOR BEFORE OPERATIONS.


☆ 确保电机电源关闭

标准机针系统是“DPX17”。

- 1) 用手打开手轮并拿起针杆放在顶部位置
- 2) 松开螺丝①，把机针②插入到孔里面直到不能插到底为止。
◇ 把机针插入在直接面对直立面的凹槽③。
- 3) 在机针上牢固的锁紧螺丝。

BE SURE TO POWER-OFF THE MOTOR. The normal needle system is ‘DPX17’ .

- 1) Turn the handwheel by hand and raise the needle bar to its top position.
- 2) Loosen screw ① and insert the needle ② into the hole until it will go on further. Insert the needle with its recess ③ facing directly to rear side.
- 3) Securely tighten the screw in the needle

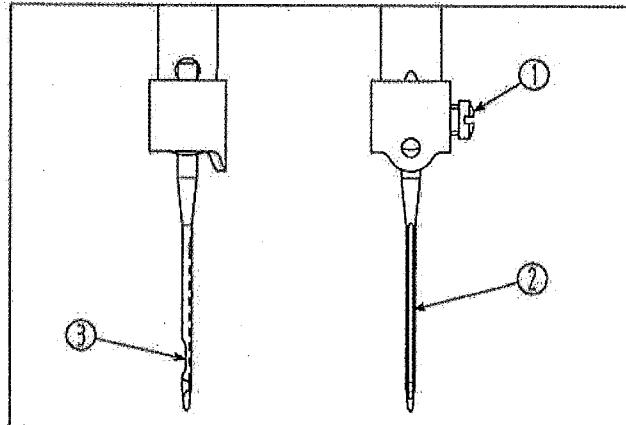

6. 旋梭的安装


6. HOW TO INSTALL THE BOBBIN

* 注意：进行此步骤时，务必关掉电源，马达确保停止转动，以避免不必要的危险！



CAUTION

TURN THE SWITCH OFF THE POWER SUPPLY TO PREVENT FROM UNEXPECTED INJURY. BE SURE TO CONFIRM THE STOP OF ROTATION OF THE MOTOR BEFORE OPERATIONS.

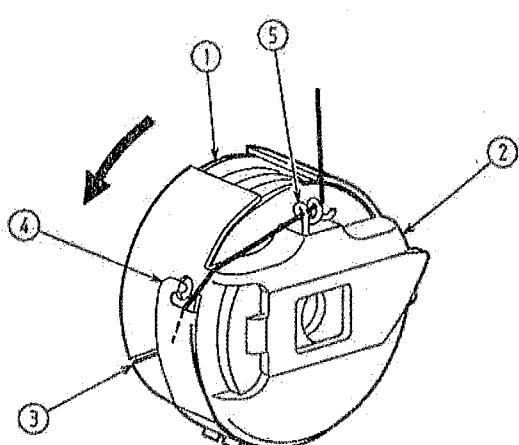

- 1) 把梭芯①放进梭壳里面②。
 - 2) 把线穿过线槽③并压住梭壳拉力弹簧的凹槽④。
 - 3) 把线尾穿过梭壳的导线器⑤并把它拉出约40mm。
- 注意：在梭线已经拉出时，安装锁壳的旋梭比便按照箭头的方向打开。

- 1) Put the bobbin ① into the bobbin case②.
- 2) Pass the thread through the threading groove ③ and notch ④ of tensionspring in the bobbin case.
- 3) Pass the end of thread through bobbin case thread guide ⑤ and pull it a length of about 40mm.

CAUTION: Fit the bobbin in the bobbin case so that the bobbin turns the direction of the arrow when the bobbin thread is pulled.


7. 机器穿线

7. HOW TO THREAD THE MACHINE HEAD

* 注意：进行此步骤时，务必关掉电源，确保马达停止转动，以避免不必要的危险！



TURN THE SWITCH OFF THE POWER SUPPLY TO PREVENT FROM UNEXPECTED INJURY. BE SURE TO CONFIRM THE STOP OF ROTATION OF THE MOTOR BEFORE OPERATIONS.

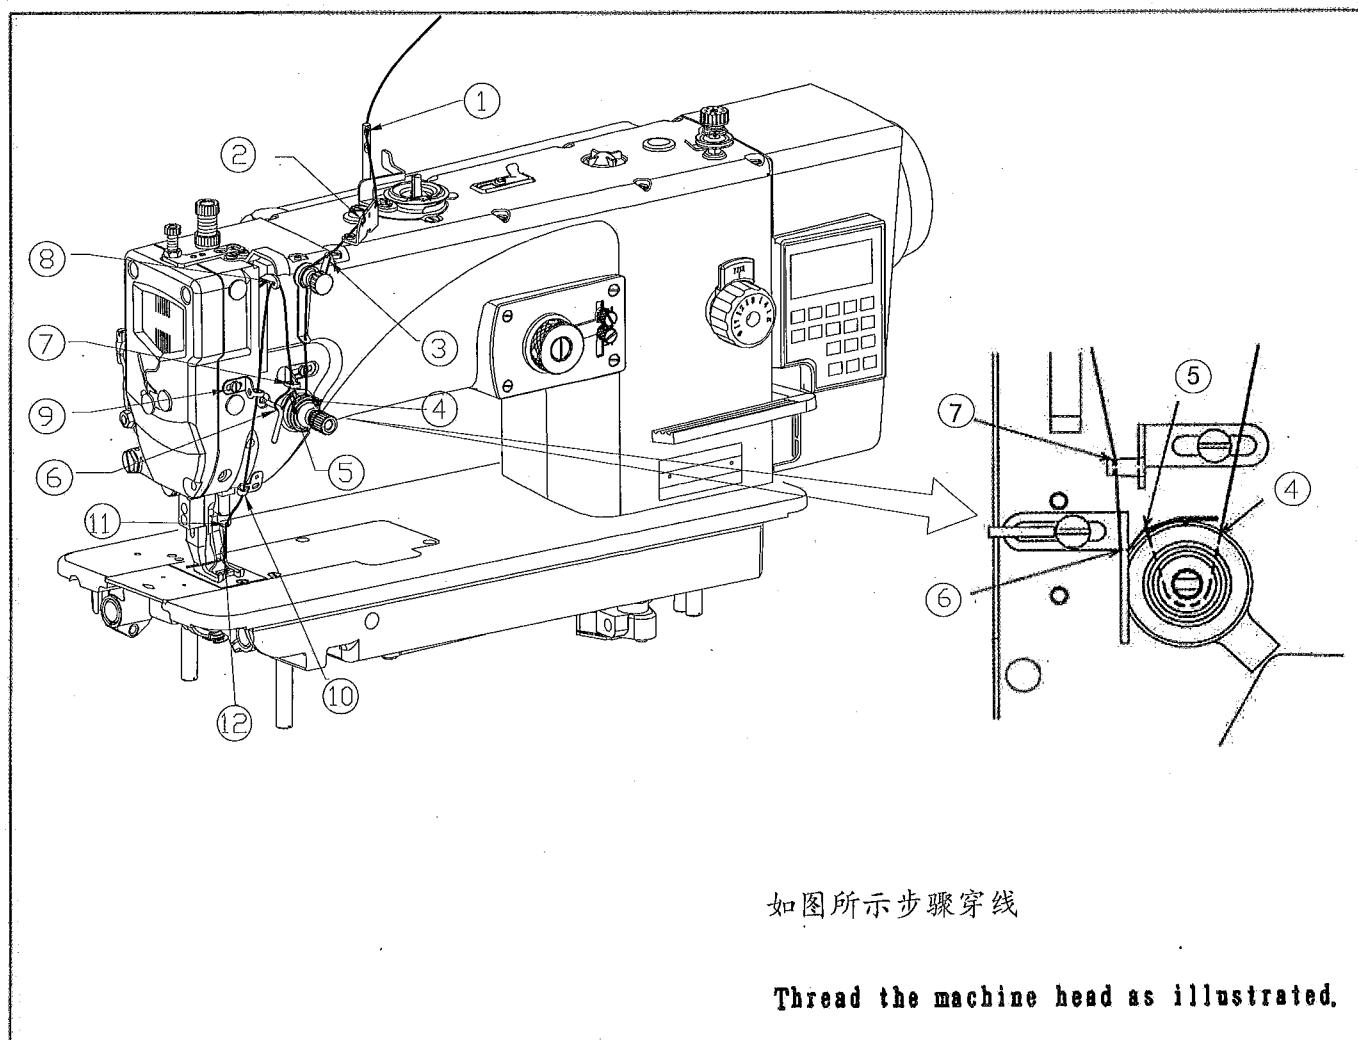

如图所示步骤穿线

Thread the machine head as illustrated.

8. 调整缝制长度


8. ADJUSTING THE STITCH LENGTH

* 注意：进行此步骤时，务必关掉电源，确保马达停止转动，以避免不必要的危险！



CAUTION

TURN THE SWITCH OFF THE POWER SUPPLY TO PREVENT FROM UNEXPECTED INJURY. BE SURE TO CONFIRM THE STOP OF ROTATION OF THE MOTOR BEFORE OPERATIONS.

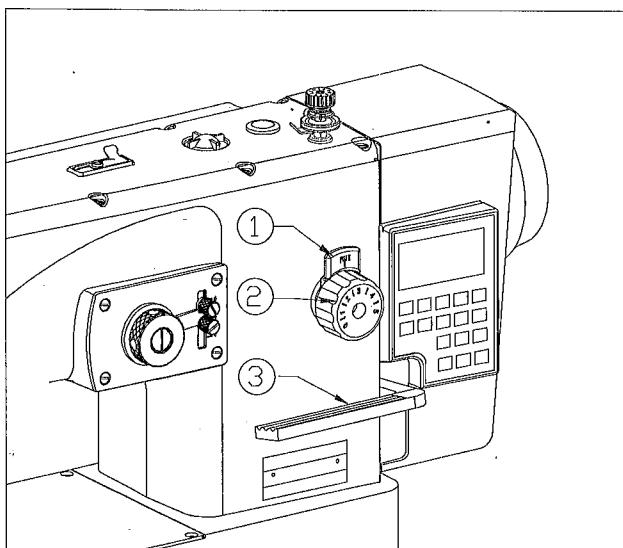

1) 推动针距按钮①，打开刻度盘②。

◇ 怎么倒送料缝制。

1) 把倒缝扳手③压下。

2) 只要压住倒缝扳手机器就可以倒送料缝制。

3) 松开杆时，机器恢复后标准缝制状态。

1) Push the stopper plate ① , and turn the dial ②.

◇ How to engage the reverse feed stitching


1) Push feed lever ③ down.

2) The machine perform revers feed stitching as long as the lever is held depressed.

3) The moment you release to leve ,the machine resumes the normal stitching mode.

9. 调节压脚压力

9. ADJUSTING THE PRESSER FOOT PRESSURE

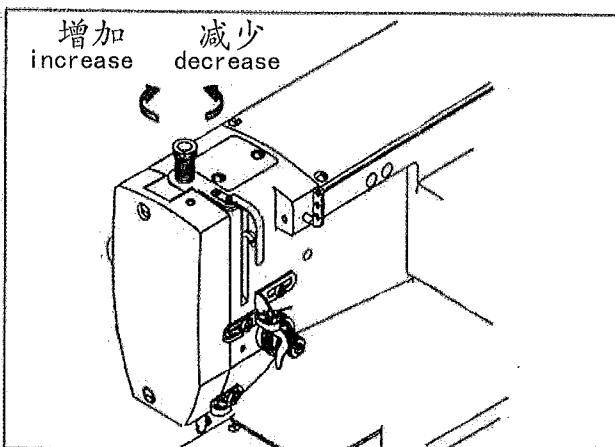

1) 向右转动压力调节器增加压力，
向左转动减少压力。

1) Turn the presser spring regulator to the right to increase and to left to decrease pressure.

13. 机针与旋梭的关系

13. NEEDLE-TO-HOOK RELATIONSHIP

* 注意：进行此步骤时，务必关掉电源，马达确保停止转动，以避免不必要的危险！



TURN THE SWITCH OFF THE POWER SUPPLY TO PREVENT FROM UNEXPECTED INJURY. BE SURE TO CONFIRM THE STOP OF ROTATION OF THE MOTOR BEFORE OPERATIONS.

依下列方式将针杆设定在合适的高度然后


- 1) 移除针板。
- 2) 设定缝目调节器为垂直状态。
- 3) 朝操作者方向转动手轮直到机针到达最低位置。
- 4) 松开机针杆螺丝①，此时只有针杆②可以自由的上下移动。
- 5) 按要求向上或下移动针杆②使其上部的计时刻度③与针杆夹④底部对齐，然后安全锁紧针杆螺丝①。

依下列方式调节机针与旋梭的时间

- 1) 在机针处于中间位置时设定机器为垂直车缝状态。
- 2) 依次调节，当机杆上升2.8mm位置时，旋梭尖⑤接触机针⑥的中间部位，此时锁紧旋梭的固定螺丝。（此时调节的粗略指示，针杆上的刻度线⑦与摆针架底面④对齐。）是粗略的指示。
- 3) 调节机针⑥与旋梭尖⑤之间间隙在0.02~0.05mm之间。

◇Set the needle bar at the proper height first as follows

- 1) Remove face plate.
- 2) Set stitch width regulator for straight stitching.
- 3) Turn machine pulley over toward you until needle descends to its lowest position.
- 4) Loosen needle bar screw 1 so that only the needle bar 2 will move up and down freely.
- 5) Move needle bar 2 up or down as required, and align upper timing mark 3 with under side of needle bar frame 4. then securely tighten needle bar set screw 1.

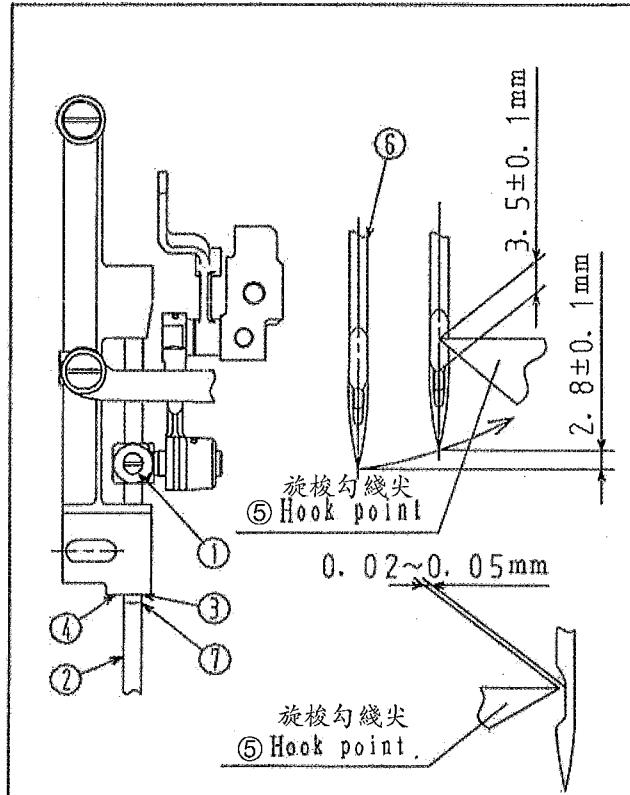

◇Adjust the timing between the needle and the hook as follows

- 1) Set machine for straight stitching at center needle position.
- 2) Adjust so that, when the needle bar goes up to 2.8mm above its lowest position, hook point 5 nearly meets the center of needle 6. Then tighten hook setscrew (As a rough indication of this adjustment , marker line 7 on needle bar aligns with the bottom face of the needle bar frame 4.)
- 3) Adjust the clearance between needle 6 and hook point 5 to 0.02 to 0.05mm.


14. 常见问题故障排除

问题	原因	解决方案
上线断裂	1. 穿线是否正确? 2. 过线器及调节区域线头是否清除? 3. 面线张力是否太紧? 4. 机针是否弯曲或机针尖钝化? 5. 机针是否安装正确? 6. 对于工作材质及线的规格，及所用机针是否正确? 7. 线有无打结搓捻?	1. 更正穿线 2. 将线头及毛球从旋梭壳及旋梭中移除 3. 调节面线张力 4. 更换机针 5. 重新正确安装机针 6. 更换适用规格的机针及线 7. 将打结搓捻的线去除
底线断裂	1. 底线穿线是否正确? 2. 底线卡住或缠线? 3. 底线张力是否正确? 4. 旋梭运转是否平衡?	1. 重新传底线 2. 从锁壳夹线弹簧片将卡线解除 3. 调整底线张力 4. 检查旋梭绕线线有无正确
车线跳针	1. 机针安装是否正确? 2. 机针是否弯曲或机针尖钝化? 3. 机针与线的要求是否符合? 4. 上线穿线是否正确?	1. 重新正确安装机针 2. 更换新机针 3. 选配适合工作材料的机针 4. 更正穿线动作顺序
断机针	1. 机针安装是否正确? 2. 机针是否弯曲或机针尖钝化? 3. 机针与线的要求是否符合? 4. 锁机针螺丝是否脱落? 5. 车缝中物料有无被拉住?	1. 重新正确安装机针 2. 更换新机针 3. 选配适合工作材料的机针 4. 锁紧锁机针螺丝 5. 车缝中不要将物料拉住
布料无法送料	1. 送料调节盘是否过度调节? 2. 压脚压力是否有适度调节?	1. 转动送料调节盘加长缝目长度 2. 加强压脚压力
布料起皱	1. 机针安装是否正确? 2. 机针是否弯曲或机针尖钝化? 3. 线张力是否太紧?	1. 更正穿线顺序 2. 更换机针 3. 适度调整线张力
回转噪音大	1. 送料齿处是否有线头或毛球? 2. 旋梭中是否有线头?	1. 清除送料齿处线头毛屑 2. 清除旋梭中的线头毛屑
机器无法启动	1. 电源插头是否有连接电源? 2. 电源开关是否在ON的位置?	1. 将插头连接电源 2. 电源开关激活在ON位置


14. TROUBLESHOOTING CHART

Problem	Cause	Solution
Needle thread break	1. Is machine properly threaded	1. Correct needle threding
	2. Are thread guides or tension discarea lint-free?	2. Remove lint and fluff in bobbin case and book
	3. Is needle-thread tension too tight?	3. Adjust needle thread tension
	4. Is needle bent or have a blunt point?	4. Replace the new needle
	5. Is needle inserted correctly?	5. Insert needle correctly
	6. Is needle the correct size for thread and fabric?	6. Select proper needle size and thread
	7. Is thread free of slubs and knots?	7. Remove slubs and knots
Bobbin thread breaks	1. Is bobbin threading correct?	1. Correct bobbin threading
	2. Iss thread tangled or caught?	2. Untangle thread from bobbin acse thread tension
	3. Is thread tension correct?	3. Ajust needle and bobbin case thread tension
	4. Dose bobbin rotate smoothly?	4. Check correctly
Stitches skip	1. Is needle inserted correctly?	1. Insert needle correctly
	2. Is needle bent or have blunt needle point?	2. Replace the new needle
	3. Is size of needle and thread switable for farbaric?	3. Select proper needle size and thread
	4. Is threading correct?	4. Correct needle threading
Needle breaks	1. Is needle properly inserted?	1. Insert needle correcting
	2. Is needle bent?	2. Replace the new needle
	3. Is needle the correct size for the fabric?	3. Select proper needle and thread for fabric
	4. Is needle clamping screw loose?	4. Tighten needle set screw
	5. Is the fabric pulled while sewing?	5. Do not pull fabric while sewing
Fabric fails to feed	1. Is feed regulating dial properly adjusted?	1. Lengthen stitch length by feed regulating dial
	2. Is presser foot pressure ajust properly?	2. Increase presser foot pressure
Fabric pukers	1. Is needle threading correct?	1. Correct needle threading
	2. Is needle point blunt?	2. Replace the new needle
	3. Is thread tension too tight?	3. Ajust needle tension properly
Rotating heavy noisy	1. Is there any lint or fluff on feed dog?	1. Remove lint and fluff from feed dog
	2. Is there any lint in rotating hook?	2. Remove lint and fluff from rotating hook
Machine fils to start	1. Are electrical plugs properly connected	1. Connect plug to power source
	2. Is power and light switch turned on?	2. Turn on power switch

Parts Manual

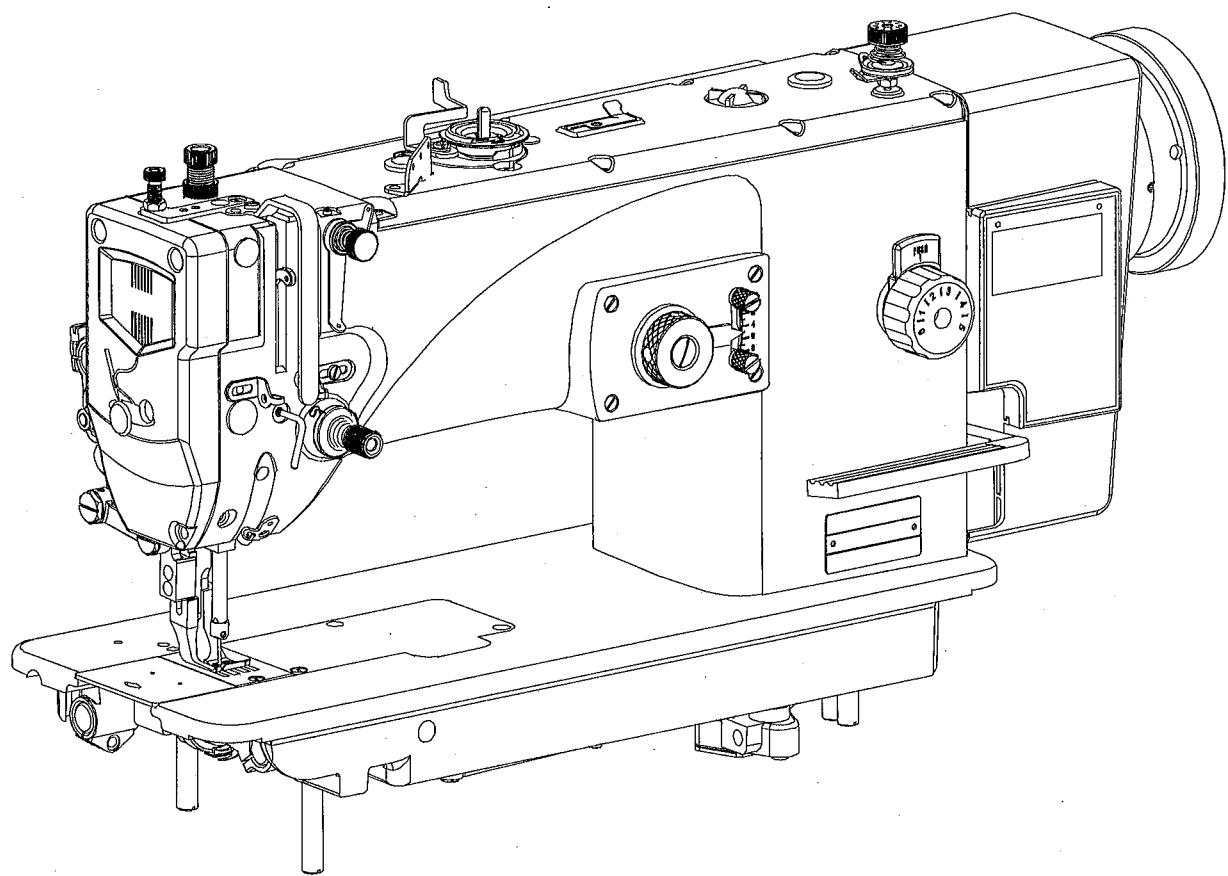

1. 机壳分组件/Machine body

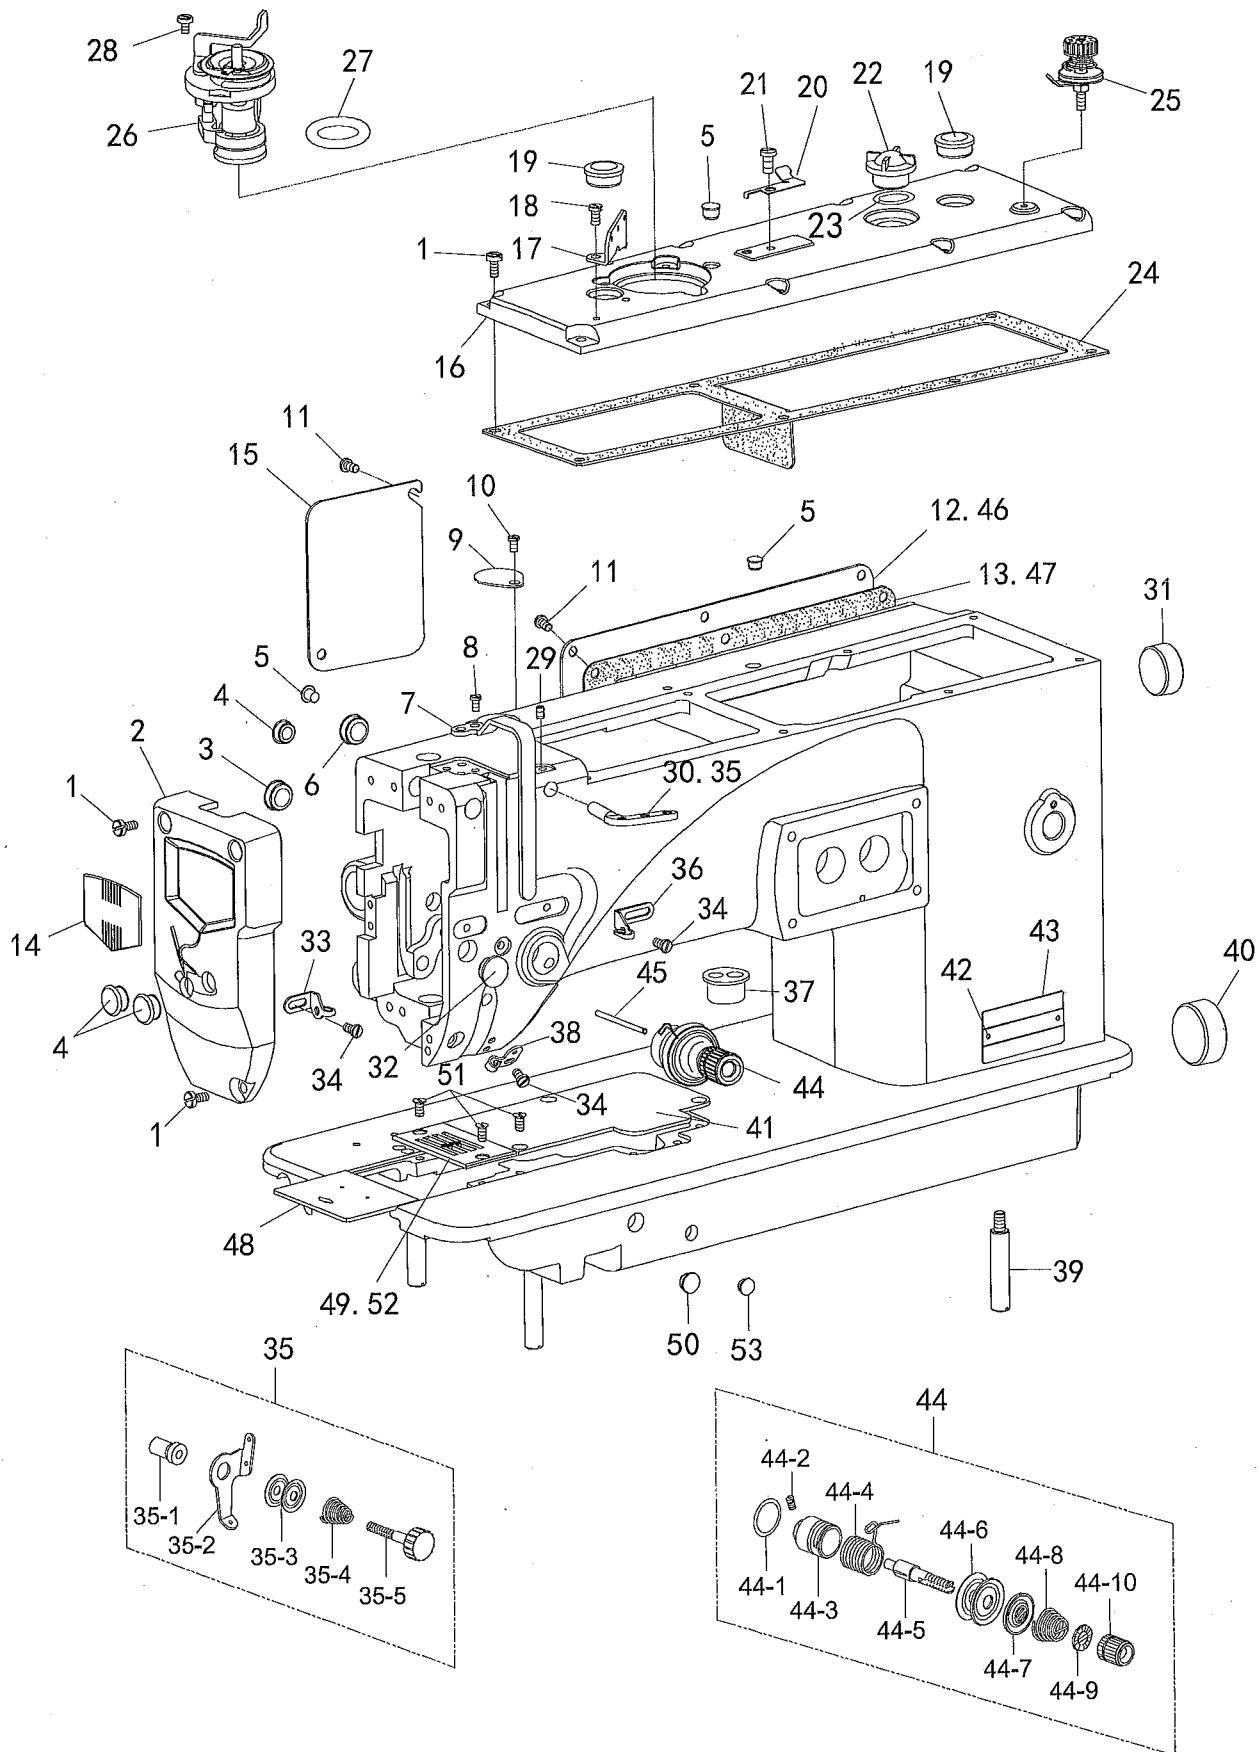


1. 机壳分组件/Machine body

序号 No.	图 号 Part No.	名 称	DESCRIPTION	数量 QTY	备注 Remark
1	15121-001	螺丝11/64-40 L=10	Screw 11/64-40 L=10	11	
2	15121-002	面板	Face plate	1	
3	15121-003	橡皮塞	Rubber plug Ø10.8x5	1	
4	15121-004	橡皮塞	Rubber plug Ø11.8x5	3	
5	15121-005	橡皮塞	Rubber plug Ø8.8x5	10	
6	15121-006	橡皮塞	Rubber plug Ø15.5x5	1	
7	15121-007	挑线杆防护罩	Thread take-up lever cover	1	
8	15121-008	螺丝11/64-40 L=8	Screw 11/64-40 L=8	2	
9	15121-009	挡板	Plate	1	
10	15121-010	螺丝11/64-40 L=5	Screw 11/64-40 L=5	1	
11	15121-011	螺丝3/16-28 L=9	Screw 3/16-28 L=9	10	
12	15121-012	后窗板	Side plate	1	
13	15121-013	后窗板垫	Gasket	1	
14	15121-014	面板贴	Face plate	1	
15	15121-015	侧板	Side plate	1	
16	15121-016	顶盖	Top_cover	1	
17	15121-017	三孔线勾	Thread retainer	1	
18	15121-018	螺丝3/16-28 L=6	Screw 3/16-28 L=6	1	
19	15121-019	橡皮塞	Rubber plug Ø18.8x6	2	
20	15121-020	割线刀	Cutter	1	
21	15121-021	螺丝3/16-28 L=6	Screw 3/16-28 L=6	1	
22	15121-022	油窗	Oil sight window	1	
23	15121-023	油窗O型圈	Rubber ring	1	
24	15121-024	顶盖垫	Top_cover_packing	1	
25	15121-025	底线夹线器	Bobbin thread tension	1	
26	15121-026	绕线器	Bobbin winder	1	
27	15121-027	绕线器O型圈	Rubber ring	1	
28	15121-028	螺钉3/16-32 L=7	Screw 3/16-32 L=7	3	
29	15121-029	螺丝11/64-40 L=6	Screw 11/64-40 L=6	1	
30	15121-030	三眼线勾	Thread retainer	1	
31	15121-031	橡皮塞	Rubber plug Ø22.3x7	1	
32	15121-032	橡皮塞	Rubber plug Ø12.8x7.5	1	
33	15121-033	左线勾	Thread guide	1	
34	15121-034	螺丝9/64-40 L=7	Screw 9/64-40 L=7	3	
35	15121-035	小夹线器组件	Thread guide assy	1	02#
35-1	15121-0351	螺母	Pre-tension nut	1	02#
35-2	15121-0352	过线板	Thread guide	1	02#
35-3	15121-0353	夹线板	Tension disc	2	02#
35-4	15121-0354	弹簧	Tension spring	1	02#
35-5	15121-0355	调压螺丝	Adjusting screw	1	02#
36	15121-036	右线勾	Arm thread guide-Right	1	
37	15121-037	过线套	Magnet cord rubber	11	02#
38	15121-038	过线套	Rubber bushing	1	
39	15121-039	底板支柱	Bed screw stud	4	
40	15121-040	橡皮塞	Rubber plug Ø27x9	1	
41	15121-041	平板盖	Cover plate	1	02#
42	15121-042	型号牌铆钉	Pole	2	
43	15121-043	型号牌	Model plate	1	
44	15121-044	夹线器组件	Thread tension bracket assy.	1	
44-1	15121-0441	夹线器组件O型圈	O ring	1	
44-2	15121-0442	夹线器组件螺钉	Set screw	1	
44-3	15121-0443	夹线器组件调节座	Thread tension bracket	1	
44-4	15121-0444	夹线器组件挑线簧	Thread take-up spring	1	
44-5	15121-0445	夹线器组件夹线螺钉	Tension stud	1	
44-6	15121-0446	夹线器组件夹线板	Disc, tension	2	
44-7	15121-0447	夹线器组件松线板	Disc, presser	1	
44-8	15121-0448	夹线器组件夹线弹簧	Tension spring	1	
44-9	15121-0449	夹线器组件止动板	Stopper	1	
44-10	15121-044A	夹线器组件夹线螺母	Tension nut	1	
45	15121-045	松线辅钉	Tension release pin	1	
46	15121-046	后盖板	Side plate	1	02#
47	15121-047	后盖板垫	Gasket	1	02#
48	15121-048	推板部件	Side plate asm.	1	
49	15121-049	针板	Throat plate	1	
50	15121-050	橡皮塞	Rubber plug Ø11.8x5	1	
51	15121-051	螺丝	Screw 11/64-40 L=8	5	
52	15121-052	针板	Throat plate	1	02#
53	15121-053	橡皮塞	Rubber plug Ø8.8x5	1	

1...#02 FOR 1512AUT , 1522AUT , 1513AUT, 1523AUT/

2. 上轴. 竖轴. 挑线机构/Upper shaft mechanism

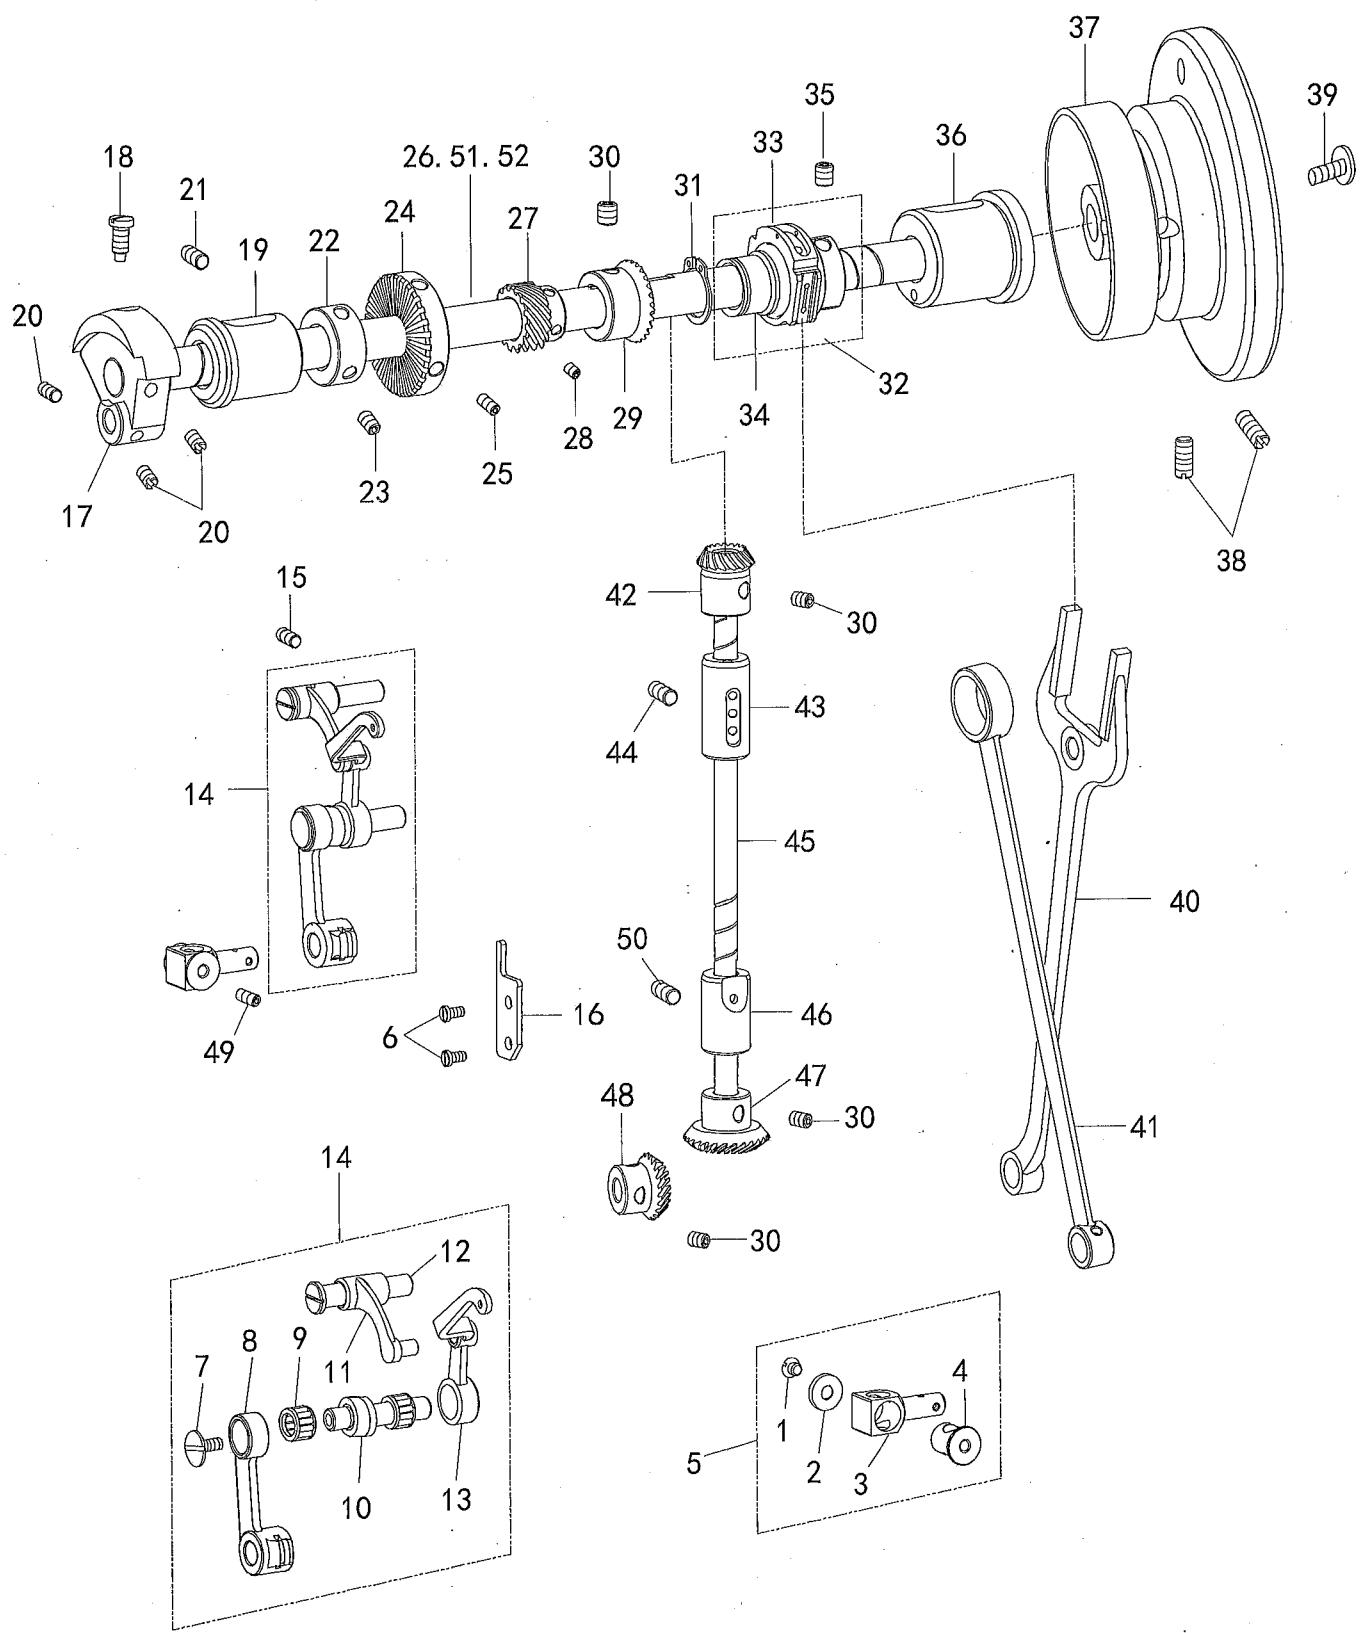


2. 上轴. 竖轴. 挑线机构/Upper shaft mechanism

序号 No.	图号 Part No. .	名称	DESCRIPTION	数量 QTY	备注 Remark
1	15122-001	螺丝 11/64-40 L=3.5	Screw 11/64-40 L=3.5	1	
2	15122-002	垫片	Washer	1	
3	15122-003	针杆接头	Needle bar clamp	1	
4	15122-004	针杆接头销	Bush	1	
5	15122-005	针杆接头组件	Needle bar clamp assy	1	
6	15122-006	螺丝 11/64-40 L=6	Screw 11/64-40 L=6	2	
7	15122-007	L螺丝 9/64-40 L=4.8	End screw left 9/64-40 L=4.8	1	
8	15122-008	针杆连杆	Needle bar crank rod	1	
9	15122-009	滚针轴承	Needle bearing	1	
10	15122-010	挑线曲柄	Needle bar crank	1	
11	15122-011	挑线连杆	Thread take-up bar	1	
12	15122-012	挑线连杆销	Thread take-up crank shaft	1	
13	15122-013	挑线连杆分组件	Thread take-up lever	1	
14	15122-014	挑线杆组件	Thread take-up lever ASM	1	
15	15122-015	螺丝15/64-28 L=13	Screw 15/64-28 L=13	1	
16	15122-016	针杆连杆导位块	Needle bar link guide	1	
17	15122-017	针杆曲柄	Thread take-up crank	1	
18	15122-018	螺丝9/32x28	Screw SM9/32x28	1	
19	15122-019	上轴前套	Upper shaft bush (front)	1	
20	15122-020	螺丝1/4-40 L=7	Screw 1/4-40 L=7	3	
21	15122-021	螺丝15/64-28 L=13	Screw 15/64-28 L=13	1	
22	15122-022	上轴挡圈	Collar	1	
23	15122-023	螺丝1/4-40 L=8	Screw 1/4-40 L=8	2	
24	15122-024	绕线摩擦轮	Friction wheel	1	
25	15122-025	螺丝11/64-40 L=6	Screw 11/64-40 L=6	2	
26	15122-026	上轴	Upper shat	1	
27	15122-027	摆针传动齿轮(上)	Bevel gear (upper)	1	
28	15122-028	螺丝11/64-40 L=4	Screw 11/64-40 L=4	2	
29	15122-029	上轴齿轮 Z=3	Upper shaft bevel gear	1	
30	15122-030	螺丝1/4-40 L=6	Screw 1/4-40 L=6	2	
31	15122-031	轴用挡圈	Retaining ring	1	
32	15122-032	送布偏心轮组件	Feed eccentric cam ASM	1	
33	15122-033	牙叉滑块	Silde rlock	1	
34	15122-034	抬牙送布偏心轮	Feed eccentric cam	1	
35	15122-035	螺丝15/64-28 L=8	Screw 15/64-28 L=8	2	
36	15122-036	上轴后套	Upper shaft bush (rear)	1	
37	15122-037	上轮	Hand wheel	1	
38	15122-038	螺丝15/64-28 L=13	Screw 15/64-28 L=13	2	
39	15122-039	螺丝11/32-28 L=13	Screw SM11/32-28 L=13	1	
40	15122-040	送布传动牙叉	Feed dog fork	1	
41	15122-041	抬牙连杆	Connecting rod	1	
42	15122-042	竖轴上齿轮 Z=22	Vertical shaft bevel gear (upper)	1	
43	15122-043	竖轴上套	vertical shaft bush (upper)	1	
44	15122-044	螺丝15/64-28 L=6	Screw 15/64-28 L=6	1	
45	15122-045	竖轴	vertical shaft	1	
46	15122-046	竖轴下套	vertical shaft bush (lower)	1	
47	15122-047	竖轴下齿轮 Z=28	Vertical shaft bevel gear (lower)	1	
48	15122-048	下轴右齿轮 Z=21	Lower shaft bevel gear	1	
49	15122-049	螺丝11/64-40 L=6	Set Screw 11/64-40 L=6	1	
50	15122-050	螺丝15/64-28 L=10	Screw 15/64-28 L=10	1	
51	15122-051	上轴	Upper shat	1	#02
52	15122-052	上轴	Upper shat	1	#03

1...#02 FOR1512AUT, 1512DD, 1513AUT, 1513DD / 2...#03 FOR1522AUT, 1522DD 1523AUT, 1523DD/


3 摆针机构/Lower shaft mechanism

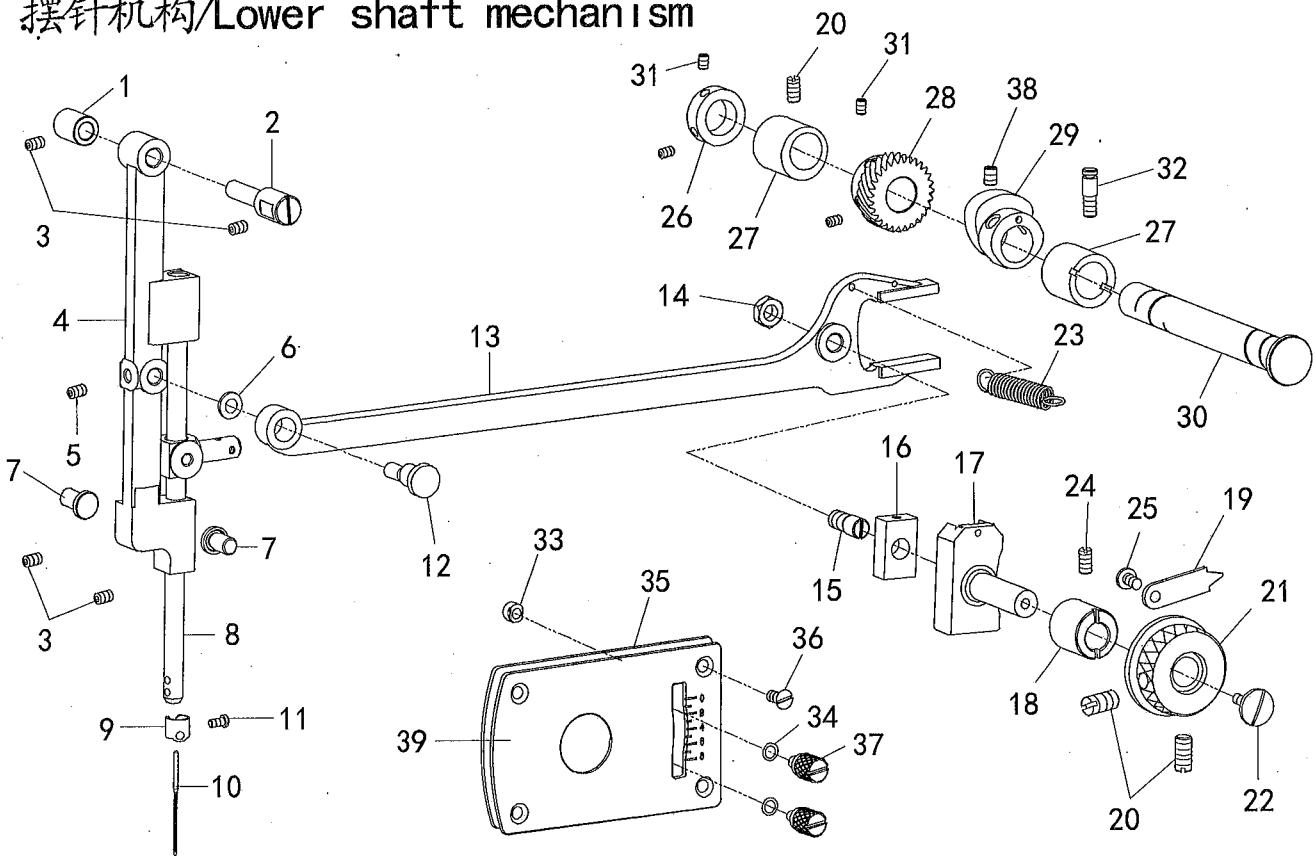

3. 摆针机构/Lower shaft mechanism

序号 No.	图号 Part No.	名称	DESCRIPTION	数量 QTY	备注 Remark
1	15123-001	摆针架悬吊轴套	Needle bar frame pin bush	1	
2	15123-002	摆针架悬吊轴	Needle bar frame pin	1	
3	15123-003	螺丝11/64-40 L=6	Screw 11/64-40 L=6	1	
4	15123-004	摆针架	Needle bar frame	1	
5	15123-005	螺丝11/64-40 L=6	Screw 11/64-40 L=6	1	
6	15123-006	垫片W5*10*1 Washer	W5*10*1 Washer	1	
7	15123-007	摆针架下挡套	Needle bar frame position	1	
8	15123-008	针杆	Needle bar	1	
9	15123-009	针杆过线环	Needle bar thread guide	1	
10	15123-010	机针	Needle	1	
11	15123-011	螺丝 1/8-44 L=4.5	1/8-44 L=4.5	1	
12	15123-012	偏心销	Pin	1	
13	15123-013	摆针传动二叉	Feed dog fork	1	
14	15123-014	螺母 9/32-28 L=4	Nut 9/32-28 L=4	1	
15	15123-015	传动二叉滑块轴	Screw 9/32-28	1	
16	15123-016	传动二叉滑块	Slide block	1	
17	15123-017	传动二叉滑块座	Regulator	1	
18	15123-018	传动二叉滑块座套	Regulator bush	1	
19	15123-019	摆幅指针	Jndicalor	1	
20	15123-020	螺丝15/64-28 L=10	Screw 15/64-28 L=10	1	
21	15123-021	摆幅手转轮	Dial	1	
22	15123-022	螺丝3/16-28 L=8	Screw 11/64-40 L=8	1	
23	15123-023	摆针传动二叉拉簧	Spring holder	1	
24	15123-024	螺丝15/64-28 L=11	Screw 15/64-28 L=11	1	
25	15123-025	螺丝11/64-40 L=7	Screw 11/64-40 L=7	1	
26	15123-026	摆针传动轴挡圈	Collar	1	
27	15123-027	摆针传动轴套	Bush	2	
28	15123-028	摆针传动齿轮(下)	Bevel gear (down)	1	
29	15123-029	摆针传动偏心轮	Cam	1	
30	15123-030	摆针传动轴	Shaft	1	
31	15123-031	螺丝11/64-40 L=4	Screw 11/64-40 L=4	4	
32	15123-032	挂簧螺丝15/64-28	15/64-28	1	
33	15123-033	螺母11/64-40 L=3.5	11/64-40 L=3.5	2	
34	15123-034	O型圈 Rubber ring	Rubber ring	2	
35	15123-035	板垫	Gasket	1	
36	15123-036	螺丝11/64-40 L=7	Screw 11/64-40 L=7	4	
37	15123-037	压花螺丝11/64-40	11/64-40	2	
38	15123-038	螺丝 15/64-28 L=7	Screw 15/64-28 L=7	2	
39	15123-039	摆幅指示板	Graduated plate	1	

4. 下轴、梭轴机构/Hook mechanism

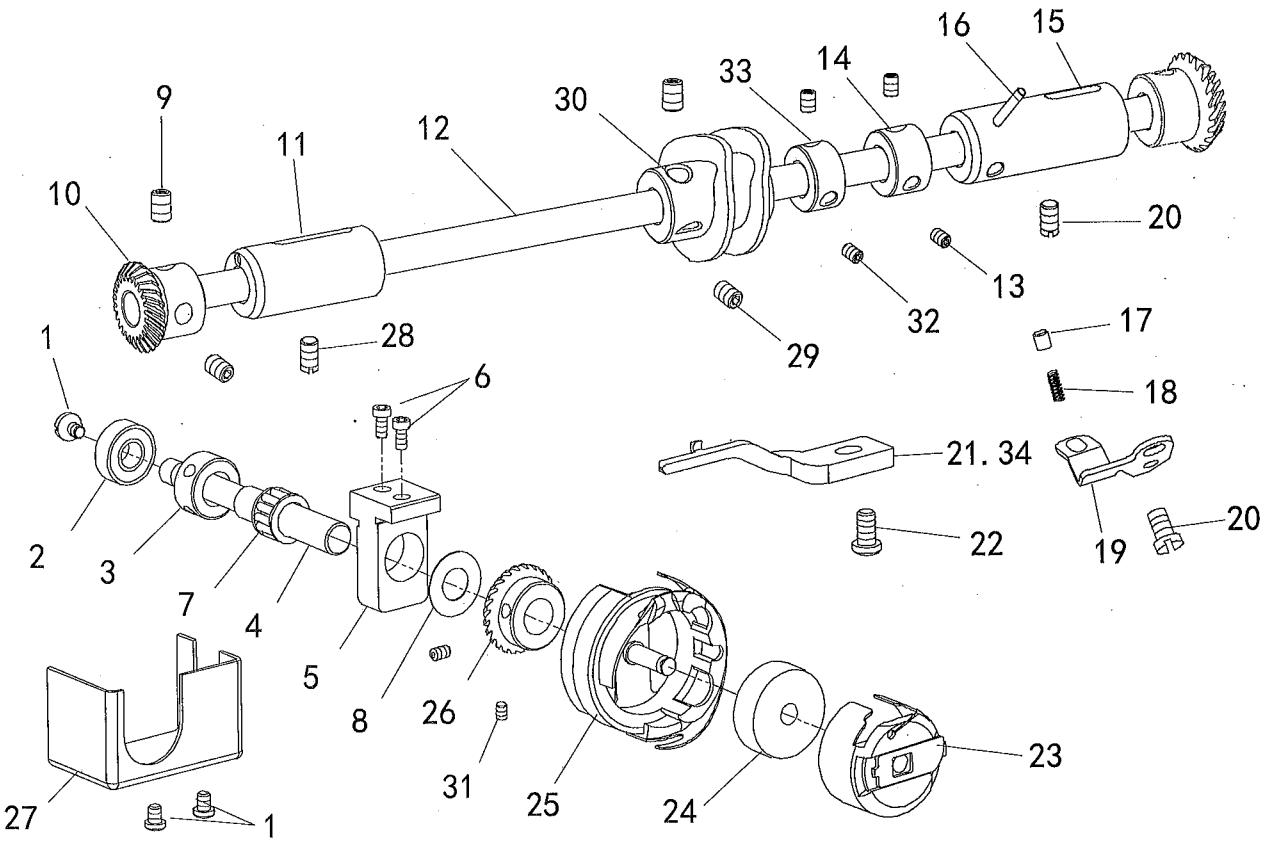


4. 下轴、梭轴机构/Hook mechanism


序号 No.	图号 Part No.	名称	DESCRIPTION	数量 QTY	备注 Remark
1	15124-001	螺丝9/64-40 L=6	Screw 9/64-40 L=6	1	
2	15124-002	696轴承	Bushing	1	
3	15124-003	梭轴挡圈	HOOK Shaft thrust collar	1	
4	15124-004	梭轴	Hook shaft	1	
5	15124-005	梭轴座	Hook shaft seat	1	
6	15124-006	螺丝M4-0.7 L=10	M4-0.7 L=10	2	
7	15124-007	滚针轴承	Needle roller bearing	1	
8	15124-008	垫片W8	Washer	1	
9	15124-009	螺丝 1/4-40 L=6	Screw 1/4-40 L=6	2	
10	15124-010	下轴齿轮	Gear of hook driving shaft	1	
11	15124-011	下轴左套D=17	Front bushing	1	
12	15124-012	下轴	Gear of hook driving shaft	1	
13	15124-013	螺丝15/64-28 L=5	Screw 15/64-28 L=5	2	
14	15124-014	下轴挡圈	Lower shaft collar	1	
15	15124-015	下轴右套D=17.5	Rear bushing	1	
16	15124-016	下轴右套油管	Oil tube	1	
17	15124-017	柱塞	Plunger	1	
18	15124-018	柱塞弹簧	Spring	1	
19	15124-019	挡板	Plate	1	
20	15124-020	螺丝15/64-28 L=13	Screw 15/64-28 L=13	1	
21	15124-021	旋梭定位勾	Positioning finger	1	
22	15124-022	螺丝11/64-40 L=9	Screw 11/64-40 L=9	1	
23	15124-023	梭壳	Bobbin case ASM.	1	
24	15124-024	梭芯	Bobbin	1	
25	15124-025	旋梭	Hook ASM.	1	
26	15124-026	梭轴齿轮	Hook shaft gear	1	
27	15124-027	黄油盒	Butter box	1	
28	15124-028	螺丝15/64-28 L=10	Screw 15/64-28 L=10	1	
29	15124-029	螺丝1/4-40 L=5	Screw 1/4-40 L=5	2	02#
30	15124-030	剪线凸轮	Trimmer driving cam	1	02#
31	15124-031	螺丝11/64-40 L=7	Screw 11/64-40 L=7	2	
32	15124-032	螺丝11/64-40 L=8	Screw 11/64-40 L=8	2	02#
33	15124-033	剪线凸轮挡圈	Collar	1	02#
34	15124-034	旋梭定位勾	Positioning finger	1	02#

1...#02 FOR 1512AUT , 1522AUT, 1513AUT, 1523AUT /

5. 缝目调节机构/Stitch width regulator mechanism

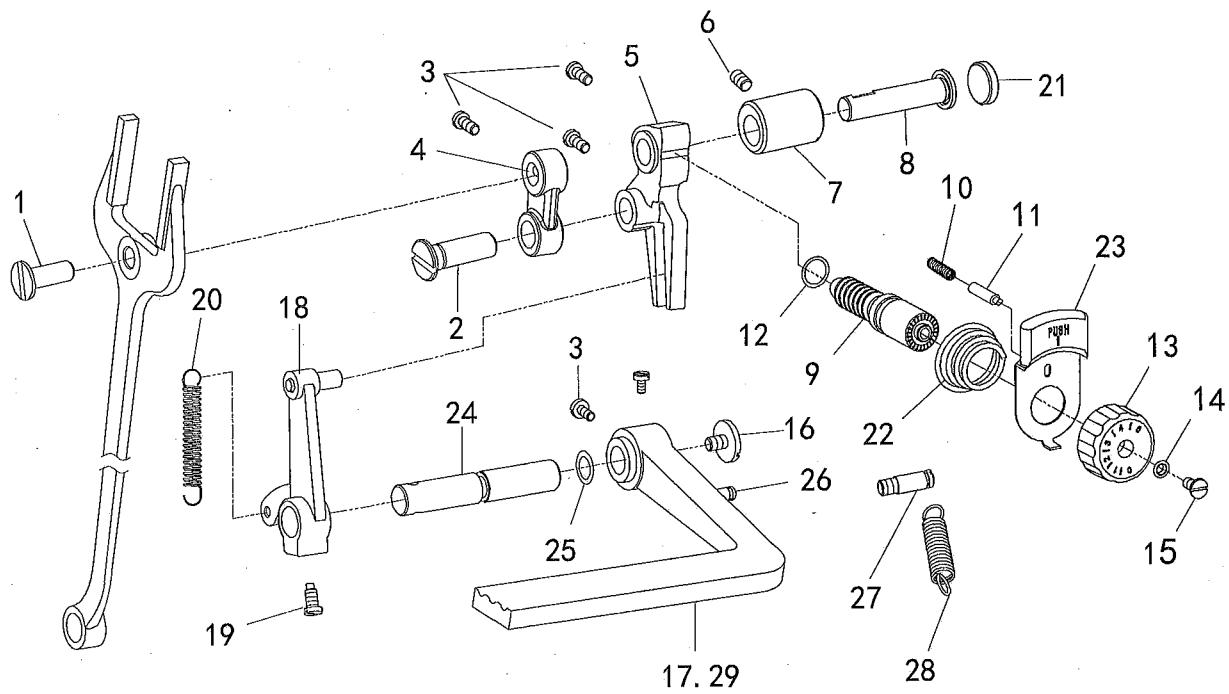

6. 下送布机构/Feed mechanism

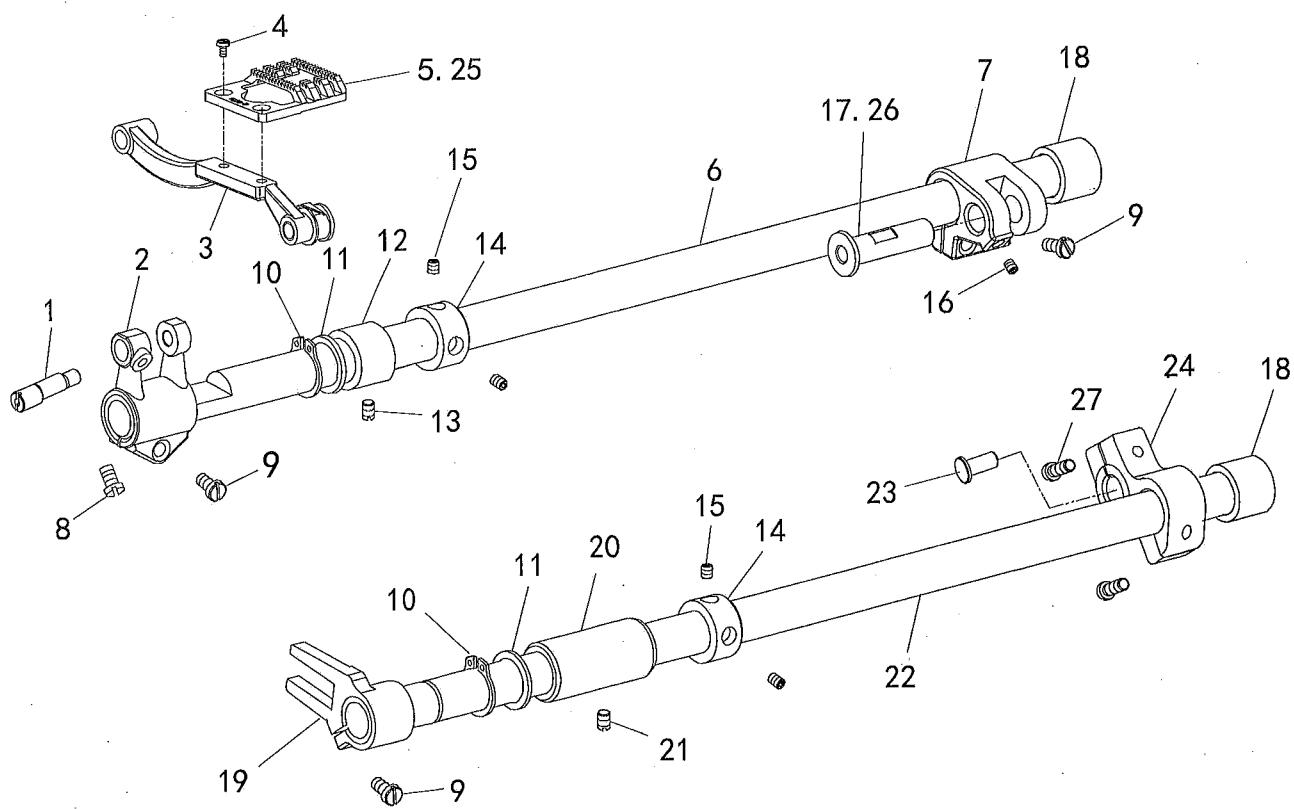

5. 缝目调节机构/Stitch width regulator mechanism

序号 No.	图号 Part No.	名称	DESCRIPTION	数量 QTY	备注 Remark
1	15125-001	牙叉铰链轴	Pin	1	
2	15125-002	针距连杆铰链轴	Pin	1	
3	15125-003	螺丝15/64-28 L=8	Screw 15/64-28 L=8	3	
4	15125-004	针距连杆	Feed connecting link	1	
5	15125-005	针距调节摆杆	Feed regulator(forked)	1	
6	15125-006	螺丝15/64-28 L=13	Screw 15/64-28 L=13	1	
7	15125-007	针距调节摆杆轴套	Eccentric bushing	1	
8	15125-008	针距调节摆杆轴	Pin	1	
9	15125-009	针距调节螺杆	Feed regulating stud	1	
10	15125-010	止动销弹簧	Feed spring	1	
11	15125-011	止动销	Feed regulating stud lock	1	
12	15125-012	O型圈	Rubber ring	1	
13	15125-013	针距标盘	Length control plate	1	
14	15125-014	针距标盘垫片	Washer	1	
15	15125-015	螺丝3/16-28 L=15	Screw 3/16-28 L=15	1	
16	15125-016	螺丝3/16-28 L=7	Screw 3/16-28 L=7	1	
17	15125-017	倒缝扳手	Reverse feed control lever	1	
18	15125-018	倒缝操纵曲柄	Reverse feed crank	1	
19	15125-019	螺丝15/64-28	Screw 15/64-28	1	
20	15125-020	复位簧	Reset spring	1	
21	15125-021	橡皮塞	Rubber plug Ø19.8x4	1	
22	15125-022	针距按钮簧	Spring	1	
23	15125-023	针距按钮	Washer	1	
24	15125-024	倒缝操纵杆轴	Reverse feed control shaft	1	
25	15125-025	O型圈	Rubber ring	1	
26	15125-026	销	Pin	1	
27	15125-027	弹簧挂销	Spring Pin	1	02#
28	15125-028	扳手复位簧	Rubber ring	1	02#
29	15125-029	倒缝扳手	Reverse feed control lever	1	02#
30	15125-030	倒缝操纵杆轴	Reverse feed control shaft	1	02#
31	15125-031	倒缝扳手压板	Plate	1	02#


1...#02 FOR 1512AUT , 1522AUT /

6. 下送布机构/Feed mechanism


序号 No.	图号 Part No.	名称	DESCRIPTION	数量 QTY	备注 Remark
1	15126-001	牙架销	Shaft	1	
2	15126-002	牙架座	Feed rock arm	1	
3	15126-003	牙架部件	Feed bar asm	1	
4	15126-004	送料牙螺丝1/8-44 L=6	Screw 1/8-44 L=6	2	
5	15126-005	送料牙	Feed dog	1	
6	15126-006	送料轴	Feed shaft	1	
7	15126-007	送料曲柄	Feed rocker arm	1	
8	15126-008	牙架销螺丝	Screw 11/64-40 L=6	1	
9	15126-009	牙架座螺丝	Screw 3/16-28 L=14	4	
10	15126-010	挡圈	Collar	2	
11	15126-011	垫片	Collar	2	
12	15126-012	送料轴前轴套	Bush, L	1	
13	15126-013	螺丝	Screw	1	
14	15126-014	抬牙送料轴挡圈	Collar	2	
15	15126-015	螺丝	Screw	4	
16	15126-016	送料曲柄销螺丝	Screw	1	
17	15126-017	送料曲柄销	Walking foot pinb	1	
18	15126-018	送料轴后轴套	Bush, R	2	
19	15126-019	抬牙叉	lifting fork	1	
20	15126-020	抬牙轴前套	Bush, L	1	
21	15126-021	螺丝	Screw	1	
22	15126-022	抬牙轴	Feed driving shaft	1	
23	15126-023	抬牙曲柄销	Pin	1	
24	15126-024	抬牙曲柄	Lifting rocker	1	
25	15126-025	送料牙	Feed dog	1	02#
26	15126-026	送料曲柄销	Walking foot pinb	1	05#
27	15126-027	螺丝	Screw	2	

1...#02 FOR 1512AUT , 1522AUT / 2...#05 FOR 1522 , 1522DD , 1522AUT /

7. 抬压脚机构/Presser foot mechanism

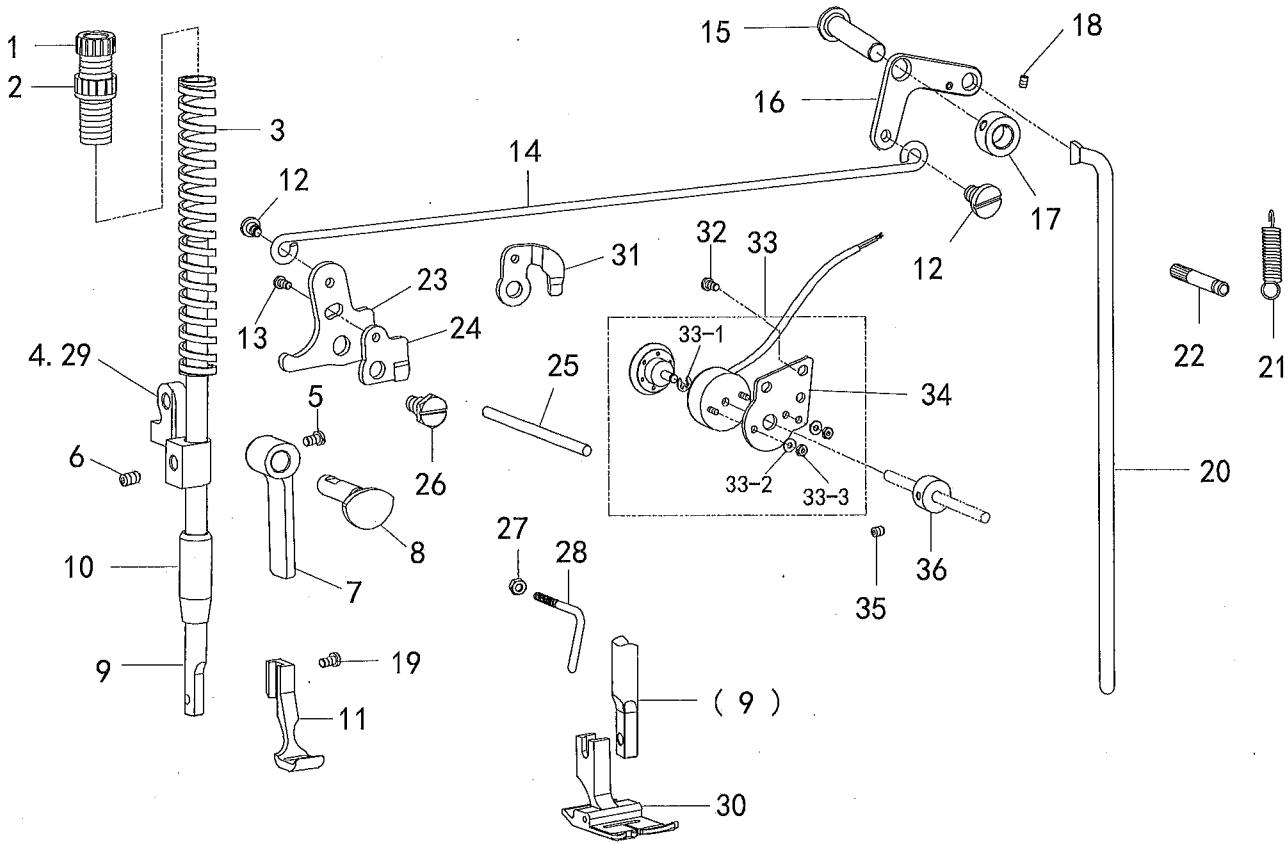

8. 多点摆针机构/3&4 points mechanism

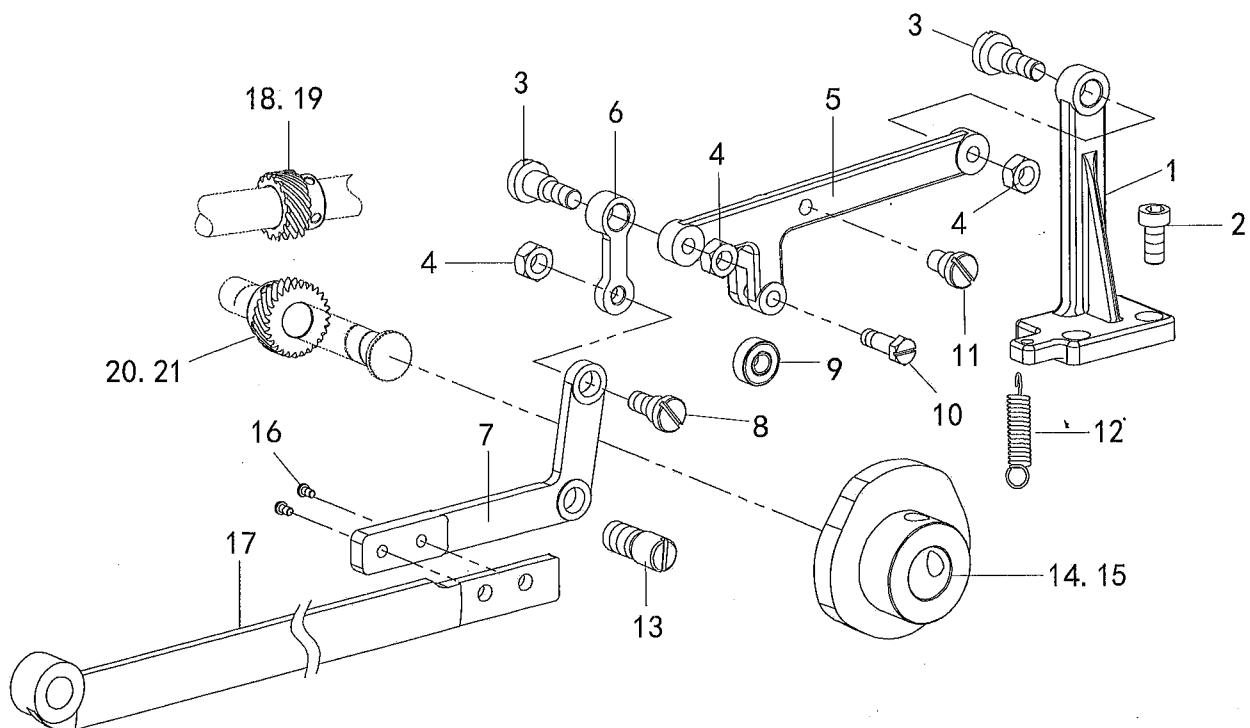

7. 抬压脚机构/Presser foot mechanism


序号 No.	图号 Part No.	名称	DESCRIPTION	数量 QTY	备注 Remark
1	15127-001	调压螺丝	Adjusting screw	1	
2	15127-002	调压螺母	Nut	1	
3	15127-003	压簧	Spring, compression	1	
4	15127-004	压杆导架	Guide bracket	1	
5	15127-005	螺丝 1/4-40 L=8	Screw 1/4-40 L=8	1	
6	15127-006	螺丝 15/64-28 L=8	Screw 15/64-28 L=8	1	
7	15127-007	抬压板手	Presser bar lifter	1	
8	15127-008	压脚扳手凸轮部件	Lifter crank	1	
9	15127-009	压杆	Presser bar	1	
10	15127-010	压杆下套	Bush	1	
11	15127-011	内压脚	Presser foot , inside	1	
12	15127-012	螺丝 3/16-28 L=8.5	Screw 3/16-28 L=8.5	2	
13	15127-013	螺丝 11/64-40 L=6.5	Screw 11/64-40 L=6.5	1	
14	15127-014	抬压脚拉杆	Collecting rod	1	
15	15127-015	后杠杆轴	Pin	1	
16	15127-016	抬压脚后杠杆	Lever	1	
17	15127-017	挡圈	Collar	1	
18	15127-018	螺丝 11/64-40 L=4	Screw 11/64-40 L=4	2	
19	15127-019	螺丝 9/64-40 L=7	Screw 9/64-40 L=7	2	
20	15127-020	抬压脚顶杆	Knee lifter bar	1	
21	15127-021	复位拉簧	Spring	1	
22	15127-022	拉簧销	Spring pin	1	
23	15127-023	膝控提升杠杆(左)	Lifter lever	1	
24	15127-024	松线凸轮	Guide plate	1	
25	15127-025	夹线松线杆	Tension release stud	1	
26	15127-026	段螺丝 15/64-28 L=7.5	Screw SM15/64-28 L=7.5	1	
27	15127-027	螺母 9/64-40 L=3	Nut 9/64-40 L=3	1	
28	15127-028	沙拉过线	Arm thread guide C	1	
29	15127-029	压杆导架	Guide bracket	1	05#
30	15127-030	活压脚部件	Presser foot asm.	1	
31	15127-031	压杆	Presser bar	1	02#
32	15127-032	螺丝3/16-28 L=8	Screw 3/16-28 L=8	2	02#
33	15127-033	松线电磁铁组件	Loose wire electromagnet asm.	1	02#
33-1	15127-0331	卡簧 E4	E4	1	02#
33-2	15127-0332	垫片	Gaskets	2	02#
33-3	15127-0333	螺母M3	Nut 3	2	02#
34	15127-034	松线电磁铁安装板	Mounting Plate	1	02#
35	15127-035	螺丝M4 L=5	M4 L=5	2	02#
36	15127-036	松线挡圈	Collar	1	02#

1...#02 FOR 1512AUT , 1522AUT / 2...#05 FOR 1522 , 1522DD , 1522AUT /


8. 多点摆针机构/3&4 points mechanism

序号 No.	图号 Part No.	名称	DESCRIPTION	数量 QTY	备注 Remark
1	15138-001	靠轮杆座	Rod seat.	1	
2	15138-002	螺丝 M6 L=12	Screw M6 L=12	2	
3	15138-003	段螺丝 3/16-32	Screw SM3/16-32	2	
4	15138-004	螺母 3/16-32	Nut SM3/16-32	2	
5	15138-005	靠轮杆	Bend the wheel.	1	
6	15138-006	活动连接杆	Connecting rod	1	
7	15138-007	摆针连杆	Feed dog fork	1	
8	15138-008	段螺丝 3/16-32	Screw SM3/16-32	1	
9	15138-009	滚珠轴承	Ball bearing	1	
10	15138-010	段螺丝 M4-0.75 L=6	Screw M4-0.75 L=6	1	
11	15138-011	段螺丝 3/16-28	Screw SM3/16-28	1	
12	15138-012	拉簧	Spring	1	
13	15138-013	滑块销	Screw 9/32-28	1	
14	15138-014	3点式摆针传动偏心轮	3 needle eccentric wheel	1	
15	15148-015	4点式摆针传动偏心轮	4 needle eccentric wheel	1	
16	15138-016	螺丝 M4 L=10	Screw M4 L=10	2	
17	15138-017	摆针传动连杆	Feed dog fork	1	
18	15138-018	3点摆针传动齿轮(上)	3 Bevel gear (upper)	1	
19	15148-019	4点摆针传动齿轮(上)	4 Bevel gear (upper)	1	
20	15138-020	3点摆针传动齿轮(下)	3 Bevel gear (down)	1	
21	15148-021	4点摆针传动齿轮(下)	4 Bevel gear (down)	1	

11.自动抬压脚机构/ components For (1512AUT、1513AUT)

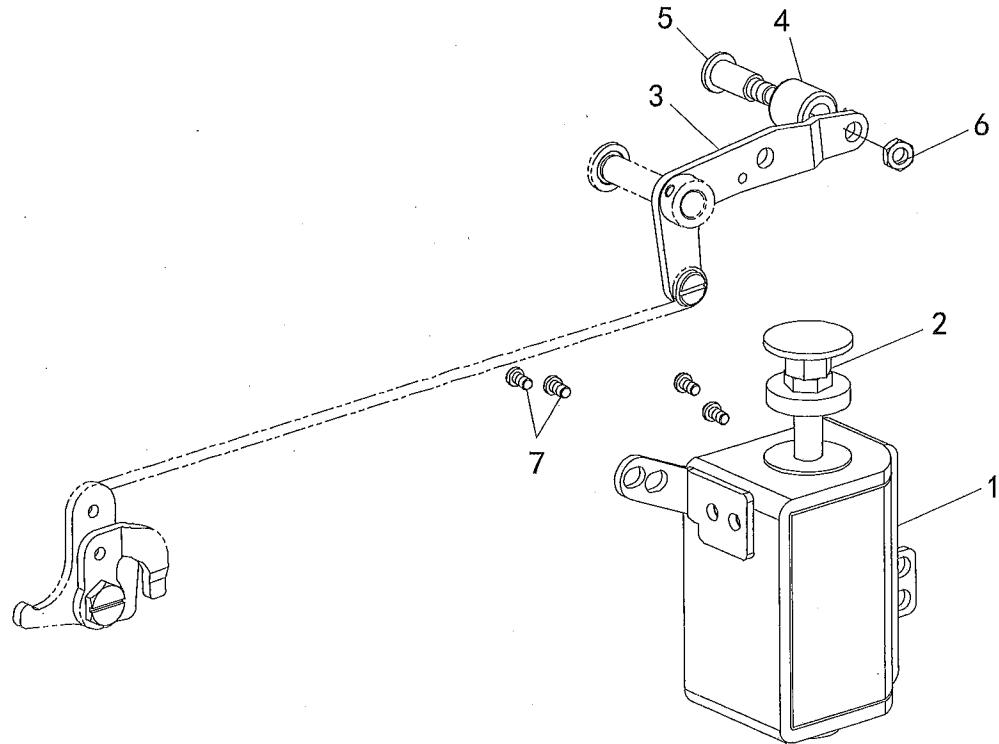

12.自动倒送料、开关组件/Automatic reverse feed components For (1512AUT, 1522AUT, 1513AUT, 1523AUT)

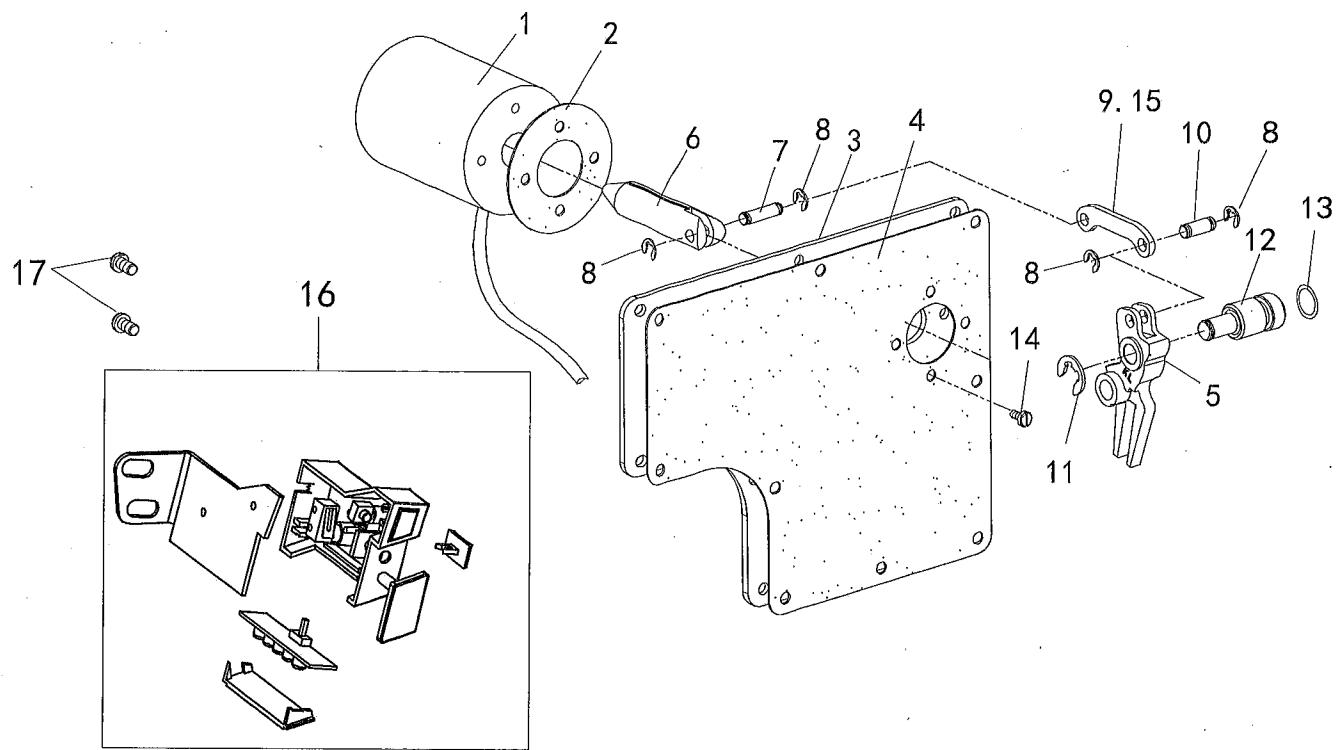

11. 自动抬压脚/Driver components

序号 No.	图号 Part No.	名称	DESCRIPTION	数量 QTY	备注 Remark
1	1512B-001A	抬压脚电磁铁	Electromagnet asm.	1	# 01
2	1512B-002A	顶帽	Top head	1	# 01
3	1512B-003A	膝控右杠杆	Lifting lever link	1	# 01
4	1512B-004A	橡胶圈	Rubber ring	1	# 01
5	1512B-005A	台阶螺丝	Screw 1/4-28	1	# 01
6	1512B-006A	螺母 1/4-28	Nut 1/4-28	1	# 01
7	1512B-007A	螺丝3/16-28 L=8	Screw 3/16-28 L=8	4	# 01


1...#01 FOR 1512AUT, 1513AUT/

12. 自动倒缝开关组件/Driver components

序号 No.	图号 Part No.	名称	DESCRIPTION	数量 QTY	备注 Remark
1	1512C-001A	倒缝电磁铁	B/T Solenoid Ass'y	1	# 02
2	1512C-002A	防油垫	Gasket for B/T Solenoid	1	# 02
3	1512C-003A	后窗板	Side plate	1	# 02
4	1512C-004A	后窗板垫	Gasket	1	# 02
5	1512C-005A	送料调节器	Feed regulator	1	# 02
6	1512C-006A	电磁铁芯	Electromagnet core	1	# 02
7	1512C-007A	销	Pin	1	# 02
8	1512C-008A	卡簧 E4	E4	4	# 02
9	1512C-009A	倒缝拉杆	Solenoid crank	1	# 01
10	1512C-010A	销	Pin	1	# 02
11	1512C-011A	卡簧E8	E8	1	# 02
12	1512C-012A	送料调节器偏心轴	Feed adjusting shaft	1	# 02
13	1512C-013A	O型圈	Rubber bushing	1	# 02
14	1512C-014A	螺丝 11/64-40 L=10	Screw 11/64-40 L=10	4	# 02
15	1512C-015A	倒缝拉杆	Solenoid crank	1	# 03
16	1512C-016A	灯组倒缝开关	Auto reverse feed switch asm	1	# 02
17	1512C-017A	螺丝 3/16-28 L=9	Screw 3/16-28 L=9	2	# 02
18	1512C-018A	扎带	Tie	1	# 02

1...#01 FOR 1512AUT , 1513AUT/ 2...#02 FOR 1512AUT , 1522AUT , 1513AUT, 1523AUT/ 3...#03 FOR 1522AUT, 1523AUT/

13. 电控部件/Driver components

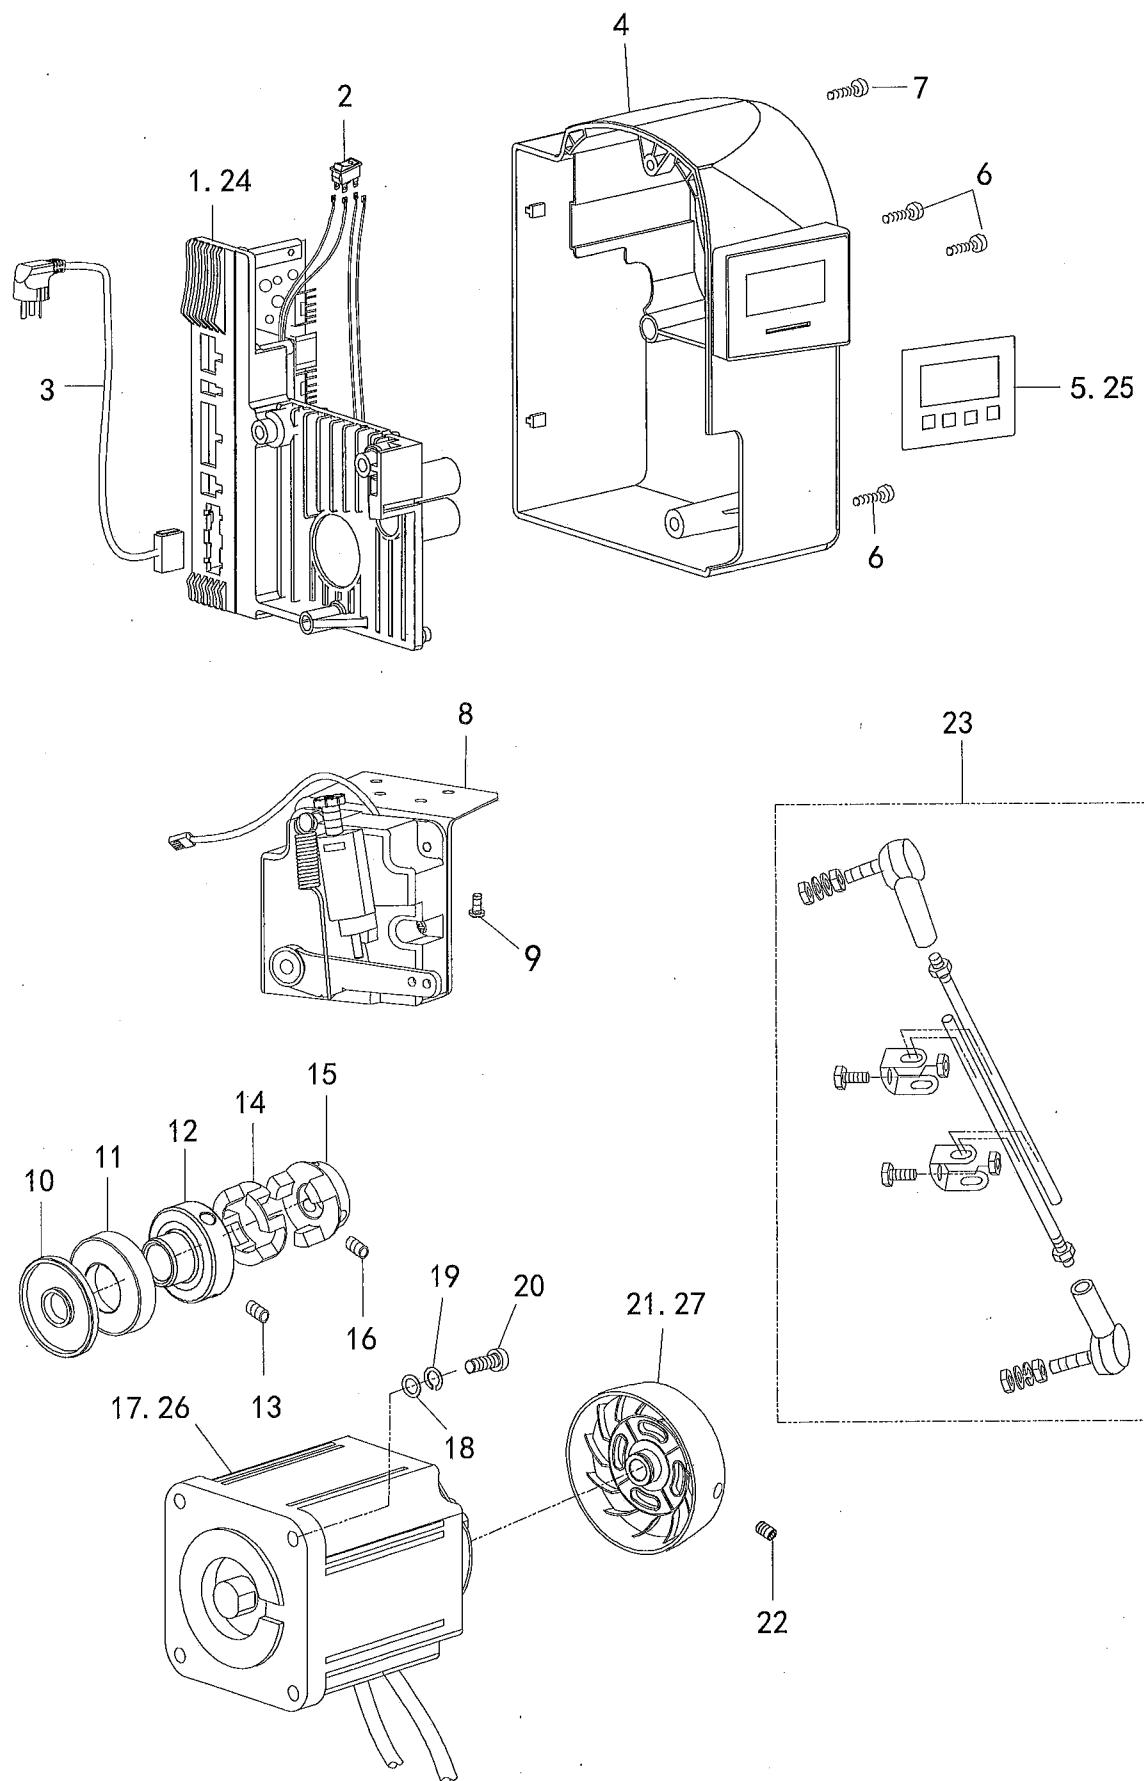


13. 电控部件/Driver components

序号 No.	图号 Part No.	名称	DESCRIPTION	数量 QTY	备注 Remark
1	1512D-001A	电控组件	Control asm	1	# 02
2	1512D-002	电源开关	Power switch	1	# 02
3	1512D-003	电源线	Power line	1	# 02
4	1512D-004	电控罩	Control cover	1	# 02
5	1512D-005A	操作面板	Face plate	1	# 02
6	1512D-006	螺丝M5 L=35	Screw M5 L=35	3	# 02
7	1512D-007	螺丝M5 L=20	Screw M5 L=20	2	# 02
8	1512D-008	脚踏控速器	Thread asm	1	# 02
9	1512D-009	螺钉	Screw	3	# 02
10	1512D-010	上轴油封	Oil seal	1	# 02
11	1512D-011	轴承	Ball bearing	1	# 02
12	1512D-012	连轴器A	Clutch component (A)	1	# 02
13	1512D-013	螺丝M6 L=6	Screw M6 L=6	3	# 02
14	1512D-014	连轴器橡胶垫	Alnico tray	1	# 02
15	1512D-015	连轴器B	Clutch component (B)	1	# 02
16	1512D-016	螺丝M6 L=6	Screw M6 L=6	3	# 02
17	1512D-017	AC伺服马达550W	AC servo motor 550W	1	# 06
18	1512D-018	垫片	Washer	4	# 02
19	1512D-019	弹性垫片	Spring washer	4	# 02
20	1512D-020	螺丝M5 L=20	Screw M5 L=20	4	# 02
21	1512D-021	手轮	Hand wheel	1	# 02
22	1512D-022	螺丝 15/64-28 L=10	Screw 15/64-28 L=10	2	# 02
23	1512D-023	拉杆组件	Live festival balllink asm	1	# 02
24	1512D-024D	电控组件	Control asm	1	# 04
25	1512D-025D	操作面板	Face plate	1	# 04
26	1512D-026D	AC伺服马达750W	AC servo motor 750W	1	# 07
27	1512D-027D	手轮	Hand wheel	1	# 07

1…#02 FOR1512AUT, 1522AUT, 1513AUT, 1523AUT / 2…#04 FOR1512DD, 1522DD 1513DD, 1523DD/

3…#06 FOR 1512DD, 1512AUT /4…#07 FOR 1522DD, 1522AUT 1523DD, 1523AUT/


14. 供油机构/Oil lubrication mechanism

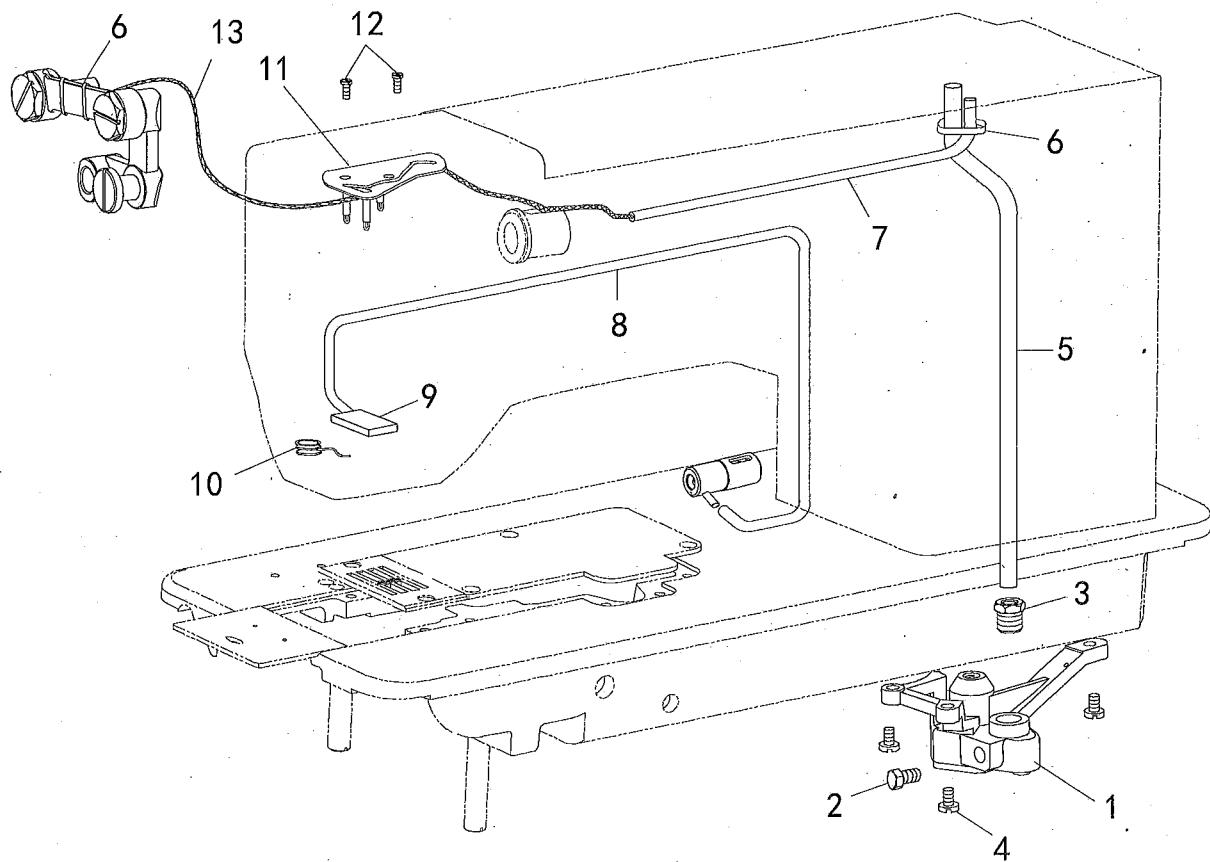

14. 供油机构/Oil lubrication mechanism

序号 No.	图号 Part No.	名称	DESCRIPTION	数量 QTY	备注 Remark
1	1512E-001	油泵组件	Oil pump	1	
2	1512E-002	螺丝 11/32-28 L=5	Screw SM11/32-28 L=5	1	
3	1512E-003	螺丝 11/32-28 L=5	Screw SM11/32-28 L=5	1	
4	1512E-004	螺丝 11/64-40 L=13	Screw 11/64-40 L=13	3	
5	1512E-005	上油管	Oil tube	1	
6	1512E-006	扎带	Tie	3	
7	1512E-007	油管	Tube assy.	1	
8	1512E-008	回油管	Tube assy.	1	
9	1512E-009	羊毛毡	Wool felt	1	
10	1512E-010	羊毛毡压簧	Spring	1	
11	1512E-011	油泵体盖板组件	Setting plate	1	
12	1512E-012	螺丝 9/64-40 L=13	Screw 9/64-40 L=13	2	
13	1512E-013	油绳	Oil tip	2	

15. 附件/Assessories

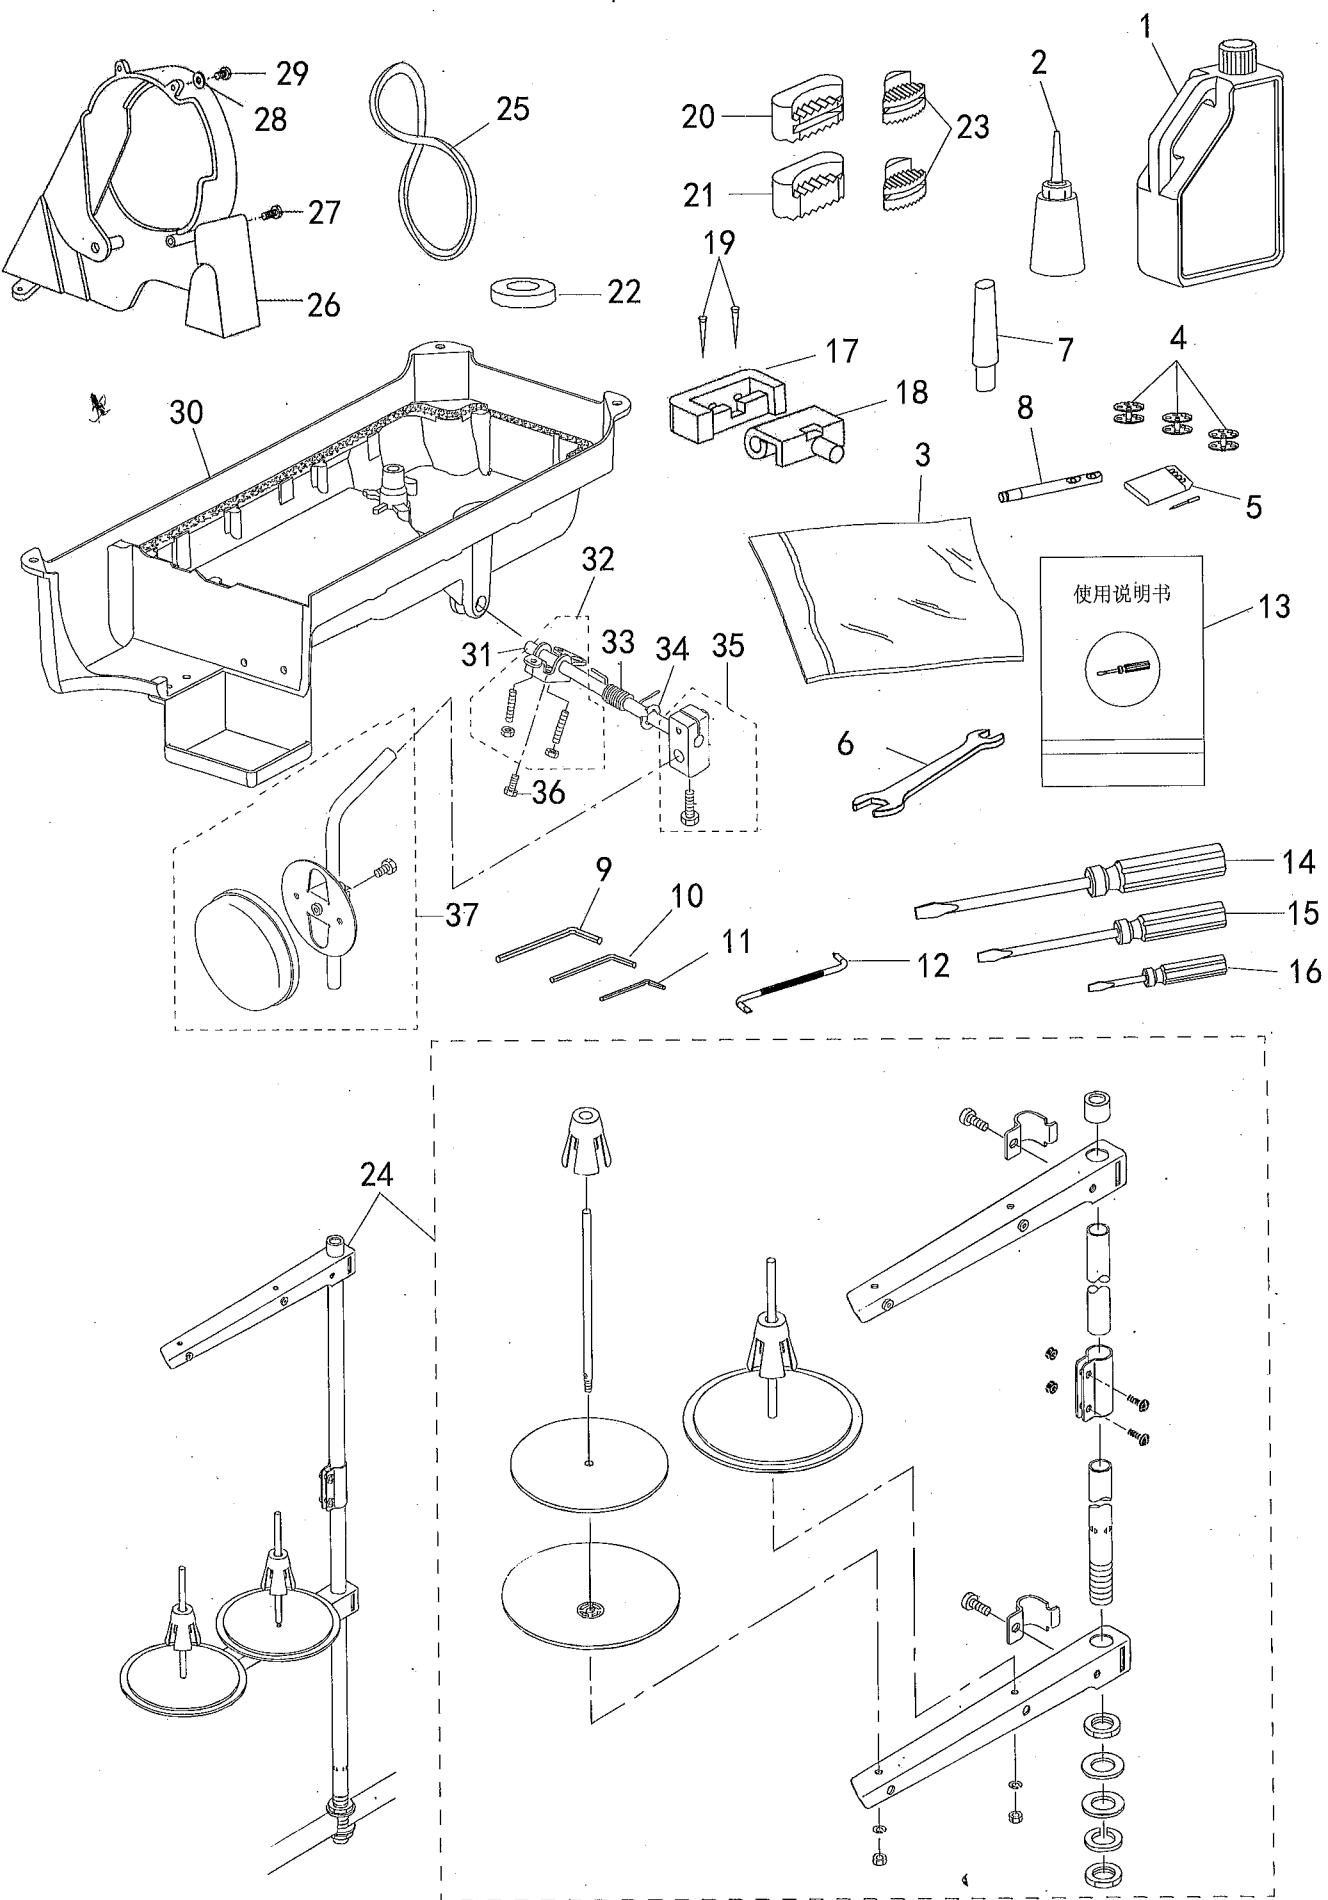

15. 附件/Assessories

序号 No.	图 号 Part No.	名 称	DESCRIPTION	数量 QTY	备注 Remark
1	1512F-001	油壶	Oil tank	1	
2	1512F-002	注油壶	Oil pot	1	
3	1512F-003	机头罩	Accessory bag	1	
4	1512F-004	梭芯	Bobbin	3	
5	1512F-005	机针包 DPX17 18#	Needle	1	
6	1512F-006	扳手	Wrench	1	
7	1512F-007	机头撑杆	Head rest	1	
8	1512F-008	过线柱	Needle thread guide pin	1	
9	1512F-009	5MM六角扳手	Wrench, 5	1	
10	1512F-010	4MM六角扳手	Wrench, 4	1	
11	1512F-011	3MM六角扳手	Wrench, 3	1	
12	1512F-012	Z型螺丝刀	Z-shaped screwdriver	1	
13	1512F-013	说明书	Instruction	1	
14	1512F-014	大起子	Screw driver, L	1	
15	1512F-015	中起子	Screw driver, M	1	
16	1512F-016	小起子	Screw driver, S	1	
17	1512F-017	机头连接钩座	Head connecting hook socket	2	
18	1512F-018	机头连接钩部件	Head connecting hook	2	
19	1512F-019	机头连接钩座钉	Head connecting hook nail	4	
20	1512F-020	防震垫右	Quakeproof washer R	1	
21	1512F-021	防震垫左	Quakeproof washer L	1	
22	1512F-022	油盘磁铁	Oil reservoir magnrt	1	
23	1512F-023	三角垫	Trigonometric washer	2	
24	1512F-024	二线架组件	Thread stand assy.	1	
25	1512F-025	V形皮带	V-belt	1	# 05
26	1512F-026	上轮罩壳	Belt cover	1	# 05
27	1512F-027	螺丝M6 L=8	M6 L=8	2	# 05
28	1512F-028	垫片	Washer	2	# 05
29	1512F-029	螺丝 11/64-40 L=8	Screw 11/64-40 L=8	2	# 05
30	1512F-030	油盘	Oil reservoir asm	1	
31	1512F-031	抬压脚轴	Knee pressing shaft	1	
32	1512F-032	抬牙脚双向曲柄组件	crank of lifting presser fot asm	1	
33	1512F-033	双向曲柄扭簧	Torsion spring	1	
34	1512F-034	开口挡圈	Snap ring	1	
35	1512F-035	抬压脚操纵杆接头	Bracket	1	
36	1512F-036	双向曲柄螺丝	Screw	1	
37	1512F-037	操纵杆部件	Knee pressing plate asm	1	

1...#05 FOR1512, 1522, 1513, 1523/



